

2015  
CATALOG

Portable

# LIGHTING



Table of

## CONTENTS

Task lighting.....	<b>3</b>
Flashlights .....	<b>20</b>
Headlamps.....	<b>45</b>
Batteries .....	<b>51</b>
Emergency lighting .....	<b>53</b>
Specialty products .....	<b>58</b>
Index by manufacturer number....	<b>60</b>

Portable

## LIGHTING

### CONSIDER USING A PORTABLE LED SOLUTION TO TAKE ADVANTAGE OF:

- » Ultra-efficient lighting
- » Reduced carbon footprint
- » Improved quality of lighting
- » Safe and reliable lighting
- » Easily controlled lighting usage
- » Short-term return on investments for long-term financial benefits

### PROVEN LIGHTING TECHNOLOGIES THAT SAVE YOU MONEY

#### DURABLE LONG LIFE

Portable LED solutions can offer up to 100,000 hours of life without periodic lamp replacement as well as being extremely durable due to their vibration resistance and solid construction with the absence of a glass or filament.

#### SPOT ON

LEDs are known for their exceptional distribution qualities that enable manufacturers to design to their exact specifications from super tight spot to extreme flood all while delivering high quality light. There is no wasted light when it comes to LEDs.

#### MORE LIGHT LESS ENERGY

No matter if it be a portable spot light or flash light, LEDs have changed the lighting industry by developing more lumens per watt. This means less energy needs to be consumed in order to get the same amount of light equating to longer lasting batteries and the ability to create smaller light sources.

#### SAFE AND RELIABLE

Many portable options are developed in series with more than one LED meaning if one goes out the others should stay lit creating a more safe and reliable system. Also an LED doesn't burn out completely but rather fades over time allowing time for change out once below required light levels.

#### ENDLESS COLOR POSSIBILITIES

We no longer need to depend solely on the outer shell to create a specified color of light; manufactures can now virtually create just about any color by either mixing different LED chips or requesting a specific color from the LED chip manufacturer. This feature allows for even more prominent color distinction adding safety and security to the portable solution.

Portable  
**LIGHTING**

Task

# LIGHTING



## In this section

Work station lighting.....	<b>4</b>
Lanterns.....	<b>11</b>
Trouble lighting.....	<b>14</b>
Dock lights .....	<b>16</b>
String lights .....	<b>17</b>

## Work station LIGHTING

### Portable Scene Light Rechargeable Lanterns

#### Streamlight

- » Selectable diffuser settings for two beam widths; works with all three modes
- » Optimum peripheral illumination for scene lighting
- » 90° swivel to aim the beam where you need it for task lighting
- » Balanced design and easy setup: less than 30 seconds for full deployment; pole extends to 72"
- » Cord built into the pole to avoid snags, stabilization legs provide balance on uneven surfaces
- » Packs to a compact size (22") for easy stowage
- » Most models meet applicable European Community Directives



Mfr. Model #	Lumens	Color	BSE Part #
45670	High: 3600; Medium: 2400; Low: 1100	Yellow	3218387

### 9470 Remote Area Lighting System

#### Pelican Products

The most innovative rechargeable lighting system on the market.

- » High flux LED with 50,000 hours of life
- » 4 lamp heads, includes O-ring
- » Polycarbonate case
- » Sealed 12V rechargeable battery, 14 hours (low), 7 hours (high)
- » RS model includes remote control activation, multi-terrain trolley and a 12V power supply port
- » ROHS compliant
- » CE compliant



Mfr. Model #	Lumens	Color	BSE Part #
9470-000-245	High: 12000; Low: 1000	Yellow	2434551
9470-000-110	High: 12000; Low: 1000	Black	2434550
9470RS	High: 12000; Low: 1000	Yellow	3187818

### 9460 Remote Area Lighting System, Dual Heads

#### Pelican Products

The ultimate maintenance free portable floodlight station to get the job done efficiently, safely and on time.

- » Telescoping dual LED light heads
- » Housed in a Pelican protector case
- » Silent operation
- » Cool operating temperatures
- » Sealed rechargeable 12V battery
- » RS model includes remote control activation, multi-terrain trolley and a 12V power supply port
- » ROHS compliant
- » CE compliant



Mfr. Model #	Lumens	Color	BSE Part #
9460-000-245	High: 6000; Low: 500	Yellow	2434549
9460-000-110	High: 6000; Low: 500	Black	2434548
9460RS	High: 6000; Low: 500	Yellow	3187817

### LED Work Lights

#### Pelican Products

Equipped with two LEDs (1000 lumens of light and 4 hours of run time), plus a 5' high mast deploys easily in seconds and illuminates an entire work area.

- » High/low water resistant switch
- » Includes battery and charger
- » Kit includes blow-molded case, lithium-ion batteries, DC vehicle charger, AC main charger with transformer, charging station and easy carry shoulder strap
- » ROHS compliant
- » CE compliant



Mfr. Model #	Lumens	Color	Description	BSE Part #
9420	High: 1000; Low: 500	Black	Work light	3187826
9420XL	High: 1000; Low: 500	Black	Kit	3187813



## 9440 Remote Area Lighting System

### Pelican Products

Moves fast to light up ravines, confined spaces, riverbanks. Anyplace generator lights can't go.

- » The mast extends 7' high when deployed, shining light over low obstructions encountered by traditional lantern style lights
- » With a 120° beam spread and up to 2400 lumens, the entire emergency area will have the light needed for a safe and swift operation
- » Maintenance free, using super tough LED lamp modules and NiMH batteries for up to 6 hours of continuous light
- » Adjustable carrying strap included
- » ROHS compliant
- » CE compliant



Mfr. Model #	Lumens	Color	Battery Life	BSE Part #
9440BLACK	High: 2400; Low: 1200	Black	8 H	3187824
9440YELLOW	High: 2400; Low: 1200	Yellow	8 H	3187815

## Nomad Prime Portable Area-Spot Lights

### FoxFury

A tactical and ready to go tripod light provides up to 4,000 lumens for up to 24 hours. The Nomad Prime converts from an area light to spotlight in seconds by attaching/detaching the diffuser lens.

- » Portable, waterproof and adaptive design allows it to be used in ways and places where other area lights cannot
- » Rechargeable and cordless design means no noisy heavy generator is needed



Mfr. Model #	Lumens	Battery Type	Battery Life	BSE Part #
200-800	4000	Rechargeable lithium-ion	9 H	3187376

## Nomad 360 Portable Area-Spot and Scene Lights

### FoxFury

Converts from an area light to spotlight to 360° scene light in seconds by sliding the diffuser lens and opening/closing the light head.

- » Portable, waterproof and self-contained
- » Can be used in places that standard scene lights, street lamps and vehicle mounted lights cannot reach



Mfr. Model #	Lumens	Battery Type	Battery Life	BSE Part #
200-900	7000	Rechargeable lithium-ion	9 H	3158587

## Nomad NOW Area-Spot Lights

### FoxFury

Converts from an area light to spotlight in seconds by sliding the diffuser lens.

- » Completely waterproof and adapts to specific needs
- » Portable enough to go anywhere



Mfr. Model #	Lumens	Battery Type	Battery Life	BSE Part #
200-400	2500	Rechargeable lithium-ion	9 H	3158586

## Nomad Carrying Bags

### FoxFury

- » Includes a shoulder strap for easier carry
- » Has pouches to fit various accessories



Mfr. Model #	Description	BSE Part #
850-200-800	For Nomad Prime and 360 area-spot lights	3187401

## Nomad Wall Mounts

### FoxFury

Set of two Nomad wall clamps for use with the Nomad Prime and 360 area lights.

- » Can be mounted to the inside/outside of vehicles or to any flat surface



Mfr. Model #	Description	Load Limit	Mounting	BSE Part #
850-800	Holds objects from 2.5" to 9.5" in diameter	50 lb	Area: 6 x 7/8"	3187381

## Wobblelight® 36"

### Wobblelight

Ideal for applications requiring temporary high-output lighting in areas from 15 to 110' diameter.

- » 360° lighting adjustable to 180° with optional reflector
- » Counter-weighted self-righting design
- » Floating shock system protects bulb from impact
- » High-impact thermoplastic housing and lens
- » No set-up, plugs into 120V AC supply



Mfr. Model #	Lumens	Wattage	Voltage	Bulb	Lighting Range	BSE Part #
111302	8000	500	110	Halogen	25'	1721449
111102	15000	175	110	Metal halide	30 - 42'	1721450
111104	40000	400	110	Metal halide	78 - 110'	1721452

## Wobblelight® 36" LED

### Wobblelight

- » 360° lighting
- » Interlink units together
- » No hot surfaces
- » Self-righting



Mfr. Model #	Lumens	Wattage	Voltage	Lighting Range	BSE Part #
11136LED	5500	65	120	30'	3189635

## Wobblelight® 27" Fluorescent Lights

### Wobblelight

The high-output, cool burning fluorescent light is ideal for use in small, confined areas.

- » Durable
- » 360° lighting
- » 5' integrated power cord
- » No hot surfaces
- » Self-righting



Mfr. Model #	Lumens	Wattage	Voltage	Lighting Range	BSE Part #
111203	5000	85	120	15 - 25'	2053162

## LED Flood Lights

### ProBuilt Professional Lighting

- » Waterproof, alloy aluminum
- » 5' integrated power cord
- » Multiple mounting options
- » No hot surfaces
- » Pure white light
- » Removable wire guard



Mfr. Model #	Lumens	Wattage	Voltage	Lighting Range	BSE Part #
311020	1700	20	120	15'	3189648
311030	2350	30	120	20'	3172820
311050	3800	50	120	25'	3189651

## Workstar Rechargeable Lights

### ProBuilt Professional Lighting

- » 4 hour recharge time
- » Mount to tripod or magnetic base
- » Water and shock resistant
- » USB charging port (511500 only)



Mfr. Model #	Lumens	Wattage	Voltage	Lighting Range	BSE Part #
511510	High: 900; Low: 450	10	120	50'	3189630
511500	High: 2200; Low: 1000	20	120	65'	3075661

## Hang-A-Lights

### ProBuilt Professional Lighting

- » 5' integrated cord
- » 6" heavy duty earth magnet
- » Eye hooks for hanging
- » No exposed glass
- » No hot surfaces



Mfr. Model #	Lumens	Wattage	Voltage	Bulb	Lighting Range	BSE Part #
111084	6400	84	120	Fluorescent	30'	3172821

## Floor Lights

### ProBuilt Professional Lighting

- » 10' integrated power cord
- » Polycarbonate lens
- » Rubberized handle/base



Mfr. Model #	Lumens	Wattage	Voltage	Bulb	Lighting Range	BSE Part #
E709166	1300	14	120	Cree LED	10'	3189645
E709165	2850	38	120	Fluorescent	15'	3189667

## MegaStar Rechargeable LED Lights

### ProBuilt Professional Lighting

- » Weatherproof
- » 10 hour recharge time
- » 360° swivel
- » Extends to 11.5'




Mfr. Model #	Lumens	Voltage	Bulb	Lighting Range	Run Time	BSE Part #
511939	14000/6000/ 3500/1000	12V 38ah SLA	Cree LED	165'	2.5 H/ 6 H/ 15 H/ 70 H	3189637

## LED 6000 Work Lights

### ProBuilt Professional Lighting

- » 10' integrated power cord
- » 120° lighting angle
- » ABS outer casing-polycarbonate lens
- » 120V



Mfr. Model #	Lumens	Bulb	Lighting Range	Includes	BSE Part #
3116000	6000	Cree LED	30'	Head only	3189631
3116001	6000	Cree LED	30'	Floor stand	3189627
3116002	6000	Cree LED	30'	Magnetic mount	3189628
3116003	6000	Cree LED	30'	Tripod	3189633

## SmithLight® Traveller Rechargeable LED

### ProBuilt Professional Lighting

- » 8 hour recharge time
- » Remote control up to 30' away
- » Safety flash mode feature
- » Waterproof and dustproof



Mfr. Model #	Lumens	Voltage	Bulb	Lighting Range	Run Time	BSE Part #
SL-TRAVELLER	720	120	Cree LED	20'	12 H	3189624

## SmithLight® Battery Operated Rechargeable LED Work Lights

### ProBuilt Professional Lighting

- » IP65 rated
- » 12 hour recharge time
- » Low battery alarm and status indicator
- » Remote control up to 30' away
- » Safety flash mode feature
- » Waterproof and dustproof



Mfr. Model #	Lumens	Voltage	Lighting Range	Run Time	BSE Part #
TM120L	1030	120	50'	12 H	3189653
IN120LB	1030 x 2	120	50' per side	30 H	3075659
IN2400L	2400	120	60'	48 H	3189669

# Portable LIGHTING

## Rechargeable Solaris Lights

### ProBuilt Professional Lighting

- » Weatherproof
- » 360° swivel
- » 6-8 hour recharge time
- » Multiple head option
- » No hot surfaces



Mfr. Model #	Lumens	Wattage	Voltage	Bulb	Lighting Range	BSE Part #
511000SLA	High: 14000; Low: 3500	120	12V 17ah SLA	Cree LED	165'	3189662
511000LITH	High: 6000; Low: 1000	120	14.8V 18.2ah Li-ion	Cree LED	165'	3189644
512000SLA	High: 28000; Low: 7000	120	12V 24ah SLA	Cree LED	165'	3189671
512000LITH	High: 12000; Low: 2000	120	14.8V 50ah Li-ion	Cree LED	165'	3189647

## Eco Uplights

### ProBuilt Professional Lighting

- » 10A power receptacle
- » Adjustable nylon carrying strap
- » Collapsible, locking tripod base
- » Removable thread hooks for hanging
- » String up to 30 lights



Mfr. Model #	Lumens	Wattage	Voltage	Lighting Range	BSE Part #
E712605	1300	18	120	10'	3189658
E712600	3250	36	120	15'	3189660

## Mini Mobi

### ProBuilt Professional Lighting

- » IP44 rated
- » Run time: 3 hours (high), 8 hours (70%)
- » Beam distance: 8'
- » Drop tested to 20'




Mfr. Model #	Lumens	Type	Battery Type	BSE Part #
E712848	55	Non-rechargeable copper-free aluminum	3 AA	3189665

## Defender LED Hand Lamps

### ProBuilt Professional Lighting

- » IP44 rated
- » Run time: 3 hours (high), 6 hours (low)
- » Beam distance: 8'



Mfr. Model #	Lumens	Type	Battery Type	BSE Part #
E712810	64	Rechargeable LED	Ni-MH	2715770

## Single Fixture Work Lights

### Bayco

Perfect for when portability in a small area is important.

- » Foam grip handle makes transporting and positioning the light a snap
- » Has tempered glass lens, a metal safety grill and is powder-coated for long wear durability
- » Spare replacement bulb in protective holder
- » cUL Listed



Mfr. Model #	Wattage	Case	Light Source	Cord Length	BSE Part #
BA-1002	500	Steel	Halogen	4'	3187761

## Convertible Halogen Dual Fixture Work Lights

### Bayco

Has dual light fixtures that can be directed independently of each other.

- » Center-mounted handle aids in removing, mounting and moving the base unit
- » Foam grip handle makes transporting and positioning the light a snap
- » Has tempered glass lens, a metal safety grill and is powder-coated for long wear durability
- » Extends to 6'
- » Spare replacement bulb in protective holder
- » cUL Listed



Mfr. Model #	Wattage	Case	Light Source	Cord Length	BSE Part #
BA-1005	500	Steel	Halogen	6'	3187762





## Wide Area Lights Industrial Duty - Halogen Floodlights

### Woodhead

- » 12/3 SOOW with 14/3 SOOW drops
- » Heavy-duty steel guards and steel frames protect the lamps and support the fixture for rigorous use
- » Quartz halogen lamp
- » Stanchion available with GFCI outlet for convenient, safe auxiliary power
- » CSA File No.: LR85374 (1301350323 only)



## Woodhead®

from **molex**

Mfr. Model #	NEMA Configuration	Wattage	Voltage	Cord Length	Mounting	BSE Part #
1301100021	Non-NEMA	100	120, 60 Hz	25'	Magnet	605291
1301100022	5-15	500	120, 60 Hz	25'	Magnet	605283
1300910192	Non-NEMA	100	120, 60 Hz	25'	Stand	589733
1301350323	5-15	500	120, 60 Hz	25'	Stand	582910
1301100023	5-15	1000	120, 60 Hz	25'	Stand	605284
1301100043	5-20	500 (2)	120, 60 Hz	1.5'	Stanchion	169999
1301100042	5-20	500 (2)	120, 60 Hz	1.5'	Stanchion	131691

## Wide Area Lights Wet Location - Incandescent Floodlights

### Woodhead

- » Gasketed NEMA 4X enclosure provides reliable lighting in wet environments
- » PAR56 lamp
- » UL File No.: E174254



## Woodhead®

from **molex**

Mfr. Model #	NEMA Configuration	Wattage	Voltage	Cord Length	BSE Part #
1301100002	5-15 Watertite®	500	120	25'	588285
1301100003	5-15 Watertite®	500	120	50'	588290
1301100004	5-15 Watertite®	500	120	100'	588314

NOTES

## Wide Area Lights Hazardous Duty - Quartz Halogen

### Woodhead

- » NEMA 4X
- » Rugged cast-aluminum enclosure and guard with heavy-duty rubber bumper
- » Sturdy, light-weight collapsible tripod
- » Two, 300W quartz halogen lamps with reflective parabolic enclosure
- » CSA File No.: LR39801; Hazardous Locations: Class I, Division 1, Groups C and D; Temperature Code; T3C



## Woodhead®

from **molex**

Mfr. Model #	Lumens	NEMA Configuration	Wattage	Voltage	Cord Length	BSE Part #
1302890001	10000	NEMA 5-15 Haz Loc	600	120	25'	3187853
1302890002	10000	NEMA 5-15 Haz Loc	600	120	50'	2643613
1302890003	10000	None	600	120	25'	3187851
1302890004	10000	None	600	120	50'	3187852

## Wide Area Lights Wet Location - HID Lighting

### Woodhead

- » Suitable for wet locations
- » Choice of metal halide or high-pressure sodium provides the desired lighting for the application
- » Feed-thru connector option makes it easy to string together multiple lights in a large area
- » Heavy-duty mounting magnets mean easy installation on many metal surfaces
- » UL File No.: E174254



## Woodhead®

from **molex**

Mfr. Model #	NEMA Configuration	Wattage	Voltage	Outlet	Cord Length	BSE Part #
1301100033	5-15 Watertite®	100	120/277	Feed-through	10'	612541
1301100034	5-15 Watertite®	70	120/277	Feed-through	10'	612563
1301100031	5-15 Watertite®	100	120/277	None	10'	613011
1301100035	5-15 Watertite®	70	120/277	None	10'	612634

TASK LIGHTING

# Portable LIGHTING

TASK LIGHTING

## Wide Area Lights Industrial Duty - Low Voltage Fluorescent

### Woodhead

- » 12V AC/DC max
- » Low-voltage fixtures provide added safety in conductive environments using Woodhead® low-voltage workstations to provide the power
- » Rubber end caps and reinforced center channel ensure durability
- » Plug and connector: NEMA 5-15 Watertite®
- » UL File No: E174254 (except 1301080097 and 1301080100); CSA File No: LR85374



Mfr. Model #	Lumens	Length	Wattage	Lamp Type	Outlet	Cord Length	BSE Part #
1301080093	5300	54.6"	64	F32/T8	None	25'	586290
1301080095	6300	30.4"	80	PL-L 40/41	None	25'	586236
1301080097	5300	54.6"	64	F32/T8	Feed-through	25'	585442
1301080099	6300	30.4"	80	PL-L 40/41	Feed-through	25'	586277
1301080100	5300	54.6"	64	F32/T8	Feed-through	4'	585535
1301080102	6300	30.4"	80	PL-L 40/41	Feed-through	4'	586140

## Wide Area Lights Industrial Duty - Fluorescent

### Woodhead

- » 120V, 60 Hz max; 16/3 SJOW
- » Multiple lamp wattages and fixture sizes mean the right light for the job
- » Rubber end caps and reinforced center channel ensure durability
- » Non-NEMA crowfoot connector
- » UL File No: E174254; CSA File No: LR85374



Mfr. Model #	Lumens	Length	Wattage	Lamp Type	Outlet	Cord Length	BSE Part #
1301080151	1820	24.6"	30	F15/T8	None	25'	584566
1301080155	4160	42.6"	50	F25/T8	None	25'	585310
1301080162	5700	54.6"	64	F32/T8	None	25'	585515
1301080094	6300	30.4"	80	PL-L 40/41	None	25'	586325
1301080103	12600	54.6"	160	PL-L 40/41	None	25'	586340
1301080157	1820	24.6"	30	F15/T8	Feed-through	4'	584580
1301080156	1820	24.6"	30	F15/T8	Feed-through	25'	584587
1301080160	4160	42.6"	50	F25/T8	Feed-through	4'	585396
1301080158	4160	42.6"	50	F25/T8	Feed-through	25'	585298
1301080167	5700	54.6"	64	F32/T8	Feed-through	4'	585331
1301080164	5700	54.6"	64	F32/T8	Feed-through	25'	585514
1301080101	6300	30.4"	80	PL-L 40/41	Feed-through	4'	586318
1301080098	6300	30.4"	80	PL-L 40/41	Feed-through	25'	586313
1301080105	12600	54.6"	160	PL-L 40/41	Feed-through	4'	586333
1301080104	12600	54.6"	160	PL-L 40/41	Feed-through	25'	586345

## LED Shoplights

### Lithonia Lighting

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages.

- » LEDs have a 50,000 hour L70 rated life
- » Starts reliably down to 0° F
- » CRI 87
- » cUL listed to US and Canadian safety standards



Mfr. Model #	Lumens	Length	Voltage	Color	CCT (K)	Cord Length	BSE Part #
1290L	1700	4'	120	White housing with white ends	4000	5'	3180993
1292L	2900	4'	120	Silver housing with black ends	4000	5'	3181058

## LED125 Series Might-D-Light Mini

### Cooper Lighting

Ideal for hands-free use. Its innovative design features three strong, rare-earth magnets and two bungee hook mechanisms allowing for easy attachment to those hard-to-hook objects.

- » Two powerful LEDs generate up to 180 lumens of adjustable light while using standard alkaline batteries. The compact folding design is perfect for confined work areas where portability is a must.



### Cooper Power Systems

by E.T.W.

Mfr. Model #	Color	Battery Life	BSE Part #
LED125	Black	4 H 30 M	3096620

NOTES

# LANTERNS

## LiteBox® Halogen Rechargeable Lanterns

### Streamlight

Portable, powerful, industrial-duty, rechargeable lantern with 90° swivel head allows for super-bright light in any direction.

- » Zero-maintenance 6V sealed lead acid battery operates up to nine hours per charge and is rechargeable up to 500 times
- » Standard system includes AC, 12V DC, shoulder strap and mounting rack
- » Rack meets requirements of NFPA 1901-12-1.7 mounted in any position



Mfr. Model #	Lumens	Voltage	Type	Color	BSE Part #
45117	150	120	Standard spotlight	Yellow	1720908
45109-SPOT	400	120	Standard spotlight	Yellow	1720909
45116	150	120	Standard spotlight	Orange	1720911
45110	400	120	Standard spotlight	Orange	1720912
45113	400	120	Standard floodlight	Yellow	1720910
45111	400	120	Standard floodlight	Orange	1720913

## E-Spot™ LED LiteBox® Lanterns

### Streamlight

An industrial-duty, rechargeable, portable lantern featuring C4® LED technology for high brightness, long runtime and reliability.

- » IPX4 rated for water-resistance
- » 3 C4® LEDs are impervious to shock with a 50,000 hour lifetime
- » Standard system includes AC/DC charge cords, shoulder strap and mounting rack
- » Vehicle mount system includes DC charge cord and mounting rack
- » Power failure system includes AC/DC charge cords, shoulder strap and mounting rack



Mfr. Model #	Lumens	Description	Color	BSE Part #
45851	High: 540; Low: 330	Standard system	Orange	2580569
45871	High: 540; Low: 330	Standard system	Yellow	2580572
45855	High: 540; Low: 330	Vehicle mount system	Orange	3187663
45875	High: 540; Low: 330	Vehicle mount system	Yellow	3187664
45857	High: 540; Low: 330	Power failure system	Orange	2483930
45867	High: 540; Low: 330	Power failure system	Beige	2483931
45856	High: 540; Low: 330	Without charger	Orange	3097706
45866	High: 540; Low: 330	Without charger	Beige	3187628
45876	High: 540; Low: 330	Without charger	Yellow	3187627

## E-Flood® LED LiteBox® Rechargeable Lanterns

### Streamlight

- » IPX4 rated for weather resistant operation
- » LED solid state circuitry provides regulated light output throughout battery life
- » Serialized for positive identification
- » Standard system includes AC/DC chargers and mounting rack
- » Vehicle mount system includes hard-wire rack and shoulder strap
- » Power failure system includes AC/DC chargers and smart power failure circuitry that automatically illuminates the E-Flood LiteBox when the power goes off



Mfr. Model #	Lumens	Description	Color	BSE Part #
45801	High: 615; Low: 330	Standard system	Orange	3093634
45821	High: 615; Low: 330	Standard system	Yellow	3187676
45805	High: 615; Low: 330	Vehicle mount system	Orange	3187675
45825	High: 615; Low: 330	Vehicle mount system	Yellow	3178607
45807	High: 615; Low: 330	Power failure system	Orange	2483928
45817	High: 615; Low: 330	Power failure system	Beige	2483929
45806	High: 615; Low: 330	Without charger	Orange	3003402
45816	High: 615; Low: 330	Without charger	Beige	3187652
45826	High: 615; Low: 330	Without charger	Yellow	3187651

## The Siege® Alkaline Lanterns

### Streamlight

Removable, polycarbonate, glare-reducing cover provides soft, even, 360° light distribution. Comfortable to use in close quarters without impairing vision.

- » IPX7 waterproof to 1 meter submersion; floats; 2 meter impact resistance tested
- » Incorporated D-rings on top and bottom to hang in either inverted or upright positions; spring-loaded to stow against the light, out of the way when not in use
- » Ergonomic handle designed to lock in upright or stowed position; incorporated hook allows for hanging on an edge, branch, rope, cables or pipes
- » ROHS compliant



Mfr. Model #	Lumens	Description	BSE Part #
44931	High: 340; Med: 175; Low: 33	Beam color changes, white or red	3128606







## Lantern Charge Cords

### Streamlight

Always be prepared with a variety of charging cords.



Mfr. Model #	Description	BSE Part #
22050	12V DC2 direct wire charge cord	1927752
22051	12V DC1 cigarette lighter charge cord	1742672
22056	12V DC power cord, HID LiteBox	3187517
22311	120V AC charge cord (Except UltraStinger Fast Charger)	1927754

## 9410L LED Lanterns

### Pelican Products

At just 3 pounds and 741 lumens, this lantern packs the power without the weight.

- » 4 LEDs, powered by the latest generation NiMH batteries illuminate a distance of 450 yards (411.5 meters)
- » 120° rotating head
- » Burn time: 4.75 hours (low)  
1.75 hours (high)
- » 3 mode switch (high, low, flashing)
- » Shoulder strap included



Mfr. Model #	Lumens	Voltage	Color	BSE Part #
9410LBLACK	High: 1131; Low: 558	7.4	Black	3187816
9410LYELLOW	High: 1131; Low: 558	7.4	Yellow	3187814

## 9415 LED Lanterns

### Pelican Products

Safety approved for the most volatile work areas, the 9415 is safe and one of the most compact, high output lanterns on the market.

- » 4 LEDs, powered by the latest generation Ni-MH batteries illuminate a distance of 360 yards (325 meters)
- » 120° rotating head; run time: 12 hours (low)  
4 hours 30 minutes (high)
- » 3 mode switch (high, low, flashing)
- » Shoulder strap included
- » Approvals: Class I Div. 1 Groups ABCD T4



Mfr. Model #	Lumens	Voltage	Color	Battery Type	BSE Part #
9415	High: 413; Low: 159	4.8	Yellow	4 D	3187827

## 9435 Remote Area Lighting System

### Pelican Products

It's 1500 lumens illuminate hazardous locations, and with two power settings the 9435 extends burn time up to 10 hours of clean even light.

- » NiMH battery type



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
9435	High: 1500; Low: 750	Orange	High: 2 H; Low: 4 H	3187828

## Panther XML Cree® LED Flashlights

### ProBUILT Professional Lighting

- » IP54 rated
- » Beam distance: 1000 meters
- » 50,000 hour lamp life



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
511301	1000	Li-ion	5 H	3189657

## Trio LED Lanterns

### ProBUILT Professional Lighting

- » IP54 rated
- » Beam distance: 400 meters
- » 50,000 hour lamp life



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
511600	230	Li-ion	7 H	3189654

## LED Lanterns

### Energizer

- » IPX4
- » Shatterproof lens
- » Lasts 5X longer than incandescent
- » Includes one 6V Eveready® Super Heavy Duty® battery



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
5109LS	25	6V	65 H	2685860

# Portable LIGHTING

## Compact LED Area Lanterns

### Energizer

Continues to operate after exposure to splashing water from all directions. Meets IEC 60529 IPX4 standards.

- » Floats for easy recovery from water; 360° illumination
- » Carrying handle contains integrated; flip-up hanging hook



### Energizer

Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
EVCAL41BP	21	Red with black trim	4 AA	53 H	3195965

## Trouble LIGHTING

## Handlamps Super-Safeway™ - Industrial Duty - Fluorescent- 13W, 27W, 40W

### Woodhead

NEMA Configuration is 5-15 (1301080132, 1301080123 and 1301080126 are NON NEMA)

- » All have switches except 1301080134 and 1301080122
- » UL File No.: E59049 (only 120V AC 60Hz with switch); CSA File No.: LR85374



### Woodhead

Mfr. Model #	Lumens	Wattage	Voltage	Lamp Type	Cord Type	Cord Length	BSE Part #
1301080134	900	13	120V AC 60 Hz	PL13/41	16/3 SJTOW	25'	2644464
1301080122	900	13	120V AC 60 Hz	PL13/41	18/3 SJT00W	25'	2643357
1301080132	900	13	110V AC 50 Hz	PL13/41	16/3 SJTOW	25'	594777
1301080128	900	13	120V AC 60 Hz	PL13/41	16/3 SJTOW	25'	131335
1301080136	900	13	120V AC 60 Hz	PL13/41	16/3 SJTOW	50'	594813
1301080106	900	13	120V AC 60 Hz	PL13/41	18/3 SJT00W	25'	131331
1301080125	900	13	120V AC 60 Hz	PL13/41	18/3 SJT00W	50'	594982
1301080123	900	13	230V AC 50 Hz	PL13/41	18/3 SJT00W	25'	594811
1301080126	900	13	230V AC 50 Hz	PL13/41	18/3 SJT00W	50'	585542
1301080139	1800	27	120V AC 60 Hz	PL-L27/41	18/3 SJT00W	25'	594552
1301080143	1800	27	120V AC 60 Hz	PL-L27/41	18/3 SJT00W	50'	594626
1301080144	3150	40	120V AC 60 Hz	PL-L40/41	18/3 SJT00W	25'	594633
1301080149	3150	40	120V AC 60 Hz	PL-L40/41	18/3 SJT00W	50'	594637

## Handlamps Super-Safeway™ Industrial Duty - Fluorescent - 4W, 8W, 15W, 30W

### Woodhead

- » 120V AC, 60 Hz
- » Dual hooks provide additional options for mounting
- » Fluorescent bulbs and rubber design provide added durability and safety
- » Fluorescent handlamps offer bright, diffused illumination but remain cool to the touch
- » UL File No.: E59049 (except 1301080085 and 1301080088); CSA File No.: LR85374
- » NEMA Configuration 5-15



### Woodhead

Mfr. Model #	Lumens	Wattage	Lamp Type	Cord Length	BSE Part #
<b>Without Switch</b>					
1301080091	95	4	F4/T5	18'	131329
1301080092	300	8	F8/T5	18'	594743
<b>With Switch</b>					
1301080078	910	15	F15/T8	25'	594568
1301080083	910	15	F15/T8	50'	131330
1301080085	2000	30	F30/T8	25'	594614
1301080088	2000	30	F30/T8	50'	594948

## Handlamps Pro-Yellow® - General Duty Fluorescent

### Woodhead

- » 120V, 60 Hz
- » NEMA Configuration 5-15
- » Cord Type 18/3 SJTW
- » UL File No.: E59049; Includes switch



### Woodhead

Mfr. Model #	Lumens	Wattage	Lamp Type	Cord Length	BSE Part #
1301090020	900	13	PL13/41	20'	1461700

## Handlamps Pro-Yellow® - Commercial Duty Fluorescent

### Woodhead

- » 120V AC, 60 Hz
- » Elastomeric grips on handle improve comfort during use
- » NEMA Configuration 5-15; UL File No.: E59049
- » Cord type 18/3 SJTW; Includes switch



### Woodhead

Mfr. Model #	Lumens	Wattage	Lamp Type	Cord Length	BSE Part #
1301090028	1800	26	PL-C26/41/4P	25'	1477750
1301090029	1800	26	PL-C26/41/4P	50'	1477784



## Wide Area Lights Hazardous Duty Tube Lights - Purged Fluorescent

### Woodhead

- » 128W in a portable fixture provides maximum lighting wherever needed
- » Rubber end caps and bumpers provide protection for the light during transport and use
- » Purge light utilizes compressed air flowing through the fixture to prevent the entry of explosive vapors
- » Plug is Watertite NEMA 5-15
- » Velcro mounting strap included
- » CSA File No.: LR39801; Hazardous Locations: Class I, Division I, Groups B, C and D  
Temperature Code: T5; NEMA Configuration



Mfr. Model #	Lumens	Wattage	Lamp Type	Cord Length	BSE Part #
1301080188	11400	128	F32T8	25'	928729

## Wide Area Lights Industrial Duty - Fluorescent Tube Lights

### Woodhead

- » Up to 128W in a portable fixture provides maximum lighting wherever needed
- » Rubber end caps and bumpers provide protection for the light during transport and use
- » 16/3 SOOW, NEMA 5-15 (except 1301080203, that has no plug or connector)
- » Velcro mounting strap included for mounting convenience
- » UL File No: E174254 (except 1301080203);  
CSA File No: LR85374



Mfr. Model #	Lumens	Wattage	Voltage	Lamp Type	Cord Length	BSE Part #
1301080199	6300	80	120V AC	PL-L 40/41	25'	584606
1301080194	11400	128	120V AC	F32/T8	3'	603790
1301080187	11400	128	120V AC	F32/T8	25'	585518
With feed-through outlet						
1301080202	6300	80	120V AC	PL-L 40/41	25'	585380
1301080193	11400	128	120V AC	F32/T8	4'	585369
1301080191	11400	128	120V AC	F32/T8	25'	585355
1301080203	6300	80	230V AC	PL-L 40/41	25'	584483

## Handlamps Super-Safeway™ Incandescent Without Feed-through Outlet

### Woodhead

- » 240V max, 100W; A21 lamp
- » Ergonomically designed fencer's flange handle helps protect users from accidentally touching a hot guard
- » Rubber handles and 8-gauge steel guards provide maximum protection for bulbs and electrical components
- » UL File No.: E59251 (without cord); CSA File No.: LR85374; NEMA Configuration 5-15



Mfr. Model #	Switch	Guard	Cord Length	BSE Part #
1301020083	Yes	Quick open	-	596148
1301020084	Yes	Quick open	25' 16/3 SOOW	131657
1301020085	Yes	Quick open	50' 16/3 SOOW	605628
1301020101	Yes	Screw release	-	596728
1301020102	Yes	Screw release	25' 16/3 SOOW	605695
1301020103	Yes	Screw release	50' 16/3 SOOW	605697
1301020106	Yes	Screw release	-	596833
1301020107	Yes	Screw release	50' 16/3 SOOW	596746
1301020080	No	Quick open	-	596158
1301020081	No	Quick open	25' 16/3 SOOW	605635
1301020082	No	Quick open	50' 16/3 SOOW	605627
1301020095	No	Screw release	-	596748
1301020096	No	Screw release	25' 16/3 SOOW	605176
1301020097	No	Screw release	50' 16/3 SOOW	605180
1301020098	No	Screw release	-	131307
1301020099	No	Screw release	25' 16/3 SOOW	605655
1301020100	No	Screw release	50' 16/3 SOOW	605667

## Corded LED Work Lights With Magnetic Hook

### Bayco

Rated at 120 lumens, this work light is designed for lighting up a large area.

- » Light has 60 LEDs rated at 120 lumens arranged in a floodlight pattern
- » Two built in magnets, one at the tip of the light and the other at the mid-point of the body offer hands-free options
- » Included magnetic hook can be attached to either of the built in magnets for even more versatility
- » Octagonal body design keeps the light in place when laid on its side



Mfr. Model #	Lumens	Cord Length	BSE Part #
BA-2116	Spotlight: 12; Floodlight: 120	6'	3187759
SL-2125	Spotlight: 12; Floodlight: 120	25'	3187760

# Portable LIGHTING

## 60 LED Work Light on Metal Reel

### Bayco

Attached to a heavy duty metal reel with 50' of retractable 18/2 SVT cord. The work light is lightweight and virtually indestructible.

- » Light has 60 LEDs rated at 120 lumens arranged in a floodlight pattern
- » Two built in magnets, one at the tip of the light and the other at the mid-point of the body offer hands-free options
- » Included magnetic hook can be attached to either of the built in magnets for even more versatility



Mfr. Model #	Lumens	Cord Length	BSE Part #
SL-864	Spotlight: 12; Floodlight: 120	50'	3187766

## 2-in-1 LED Work Light With Spot Lights

### Bayco

Rechargeable LED light has both a spotlight and a floodlight built in.

- » AC and DC power supply/charger and magnetic hook
- » Light has 30 LEDs rated at 60 lumens arranged in a floodlight pattern and 4 LEDs in the base of the handle rated at 8 lumens serving as a spotlight
- » Two built in magnets, one at the tip of the light and the other at the mid-point of the body offer hands-free options
- » Octagonal body design keeps the light in place when laid on its side



Mfr. Model #	Lumens	Battery Type	BSE Part #
SLR-2134	Spotlight: 8; Floodlight: 60	Rechargeable NiMH	3187763
SLR-2166	Spotlight: 32; Floodlight: 230	Rechargeable NiMH	3187764

## Under Hood LED Work Lights

### Bayco

Built as an all LED, hands-free floodlight for the automotive enthusiast.

- » Includes AC and DC power supply/charger
- » 120 LEDs with two brightness modes - full-power and half-power
- » Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- » Light bar can be rotated 360° in the cradle or removed all together



Mfr. Model #	Lumens	Battery Type	BSE Part #
SLR-2120	High: 330; Low: 150	Rechargeable NiMH	2992815

## LED120 Rechargeable Work Lights

### Cooper Lighting

35 LED rechargeable work light with AC/DC adapters.

- » 360° Rotating swivel hook; magnetic clamp
- » Cordless rechargeable unit with AC/DC charging adapters included; cushioned grip with convenient instant-ON switch
- » Durable plastic construction with polycarbonate lens
- » Nine LED lights on the end of light doubles as a spotlight and flashlight; up to 12 hours of battery life



### Cooper Power Systems

1-877-444-4444

Mfr. Model #	Dimensions	Color	BSE Part #
LED120	4" x 17.4" x 4"	Black	3096612

## Dock LIGHTS

## Portable Dock Lights

### Lithonia Lighting

Energy-efficient LED portable dock light for commercial use in loading docks and shipping and receiving areas.

- » Wet location listed; 120V, 6000 CCT (K)
- » Provides optimal illumination across a 53' trailer to back wall
- » Operating temperature -20°C to 45°C
- » Tested in accordance to IESNA LM-79 and LM-80 standards



Mfr. Model #	Lumens	Wattage	Color	BSE Part #
LRDOC-12-MED-YEL-120-M4	1450	29.4	Yellow	3005894

## Dockstar™ LED Loading Dock Lights

### Hubbell Lighting

Perfect for industrial, manufacturing and warehousing, designed to illuminate tractor trailers up to 53' for loading and unloading.

- » Rugged, die cast aluminum body designed for maximum heat dissipation; finished in safety yellow for visibility
- » Sealed tempered glass lens; stainless steel fasteners
- » Advanced thermal management techniques and components



Hubbell Lighting, Inc.

Mfr. Model #	Lumens	Wattage	Optics	BSE Part #
DOK-6LU-6K-SP-700	776	14	12° Spot	2783591
DOK-6LU-6K-FL-700	715	17	32° Flood	2783592
DOK-12LU-6K-SP-C6	861	16	12° Spot	2783589
DOK-12LU-6K-FL-C6	783	15	32° Flood	2783590
DOK-18LU-6K-SP-350	1323	21	12° Spot	2783593
DOK-18LU-6K-FL-350	1350	24	32° Flood	2783594



# String LIGHTS

## Super-Safeway™ Incandescent Stringlights

**Woodhead**

- » Industrial duty
- » Stringer mounting style
- » A21 lamp type



Mr. Model #	Lumens	NEMA Configuration	Cord Type	Number of Sockets	Cord Length	BSE Part #
1301060098	2000	1-15	12/2 SOOW	5	100'	605437
1301060101	2000	1-15	12/2 SOOW	5	50'	605453
1301060112	2000	5-15	12/3 SOOW	5	50'	605417
1301060113	2000	5-20	12/3 SOOW	5	50'	605418
1301060114	2000	5-20	12/3 SOOW	5 with guards	50'	605419
1301060115	2000	5-15	12/3 SOOW	5 with guards	50'	605420
1301060116	2000	L5-15	12/3 SOOW	5 with guards	50'	605409
1301060117	2000	L5-20	12/3 SOOW	5 with guards	50'	605410
1301060118	2000	L5-20	12/3 SOOW	5 with guards	50'	605411
1301060119	2000	L5-15	12/3 SOOW	5 with guards	50'	605412
1301060104	2000	5-15	12/3 SOOW	10	100'	605456
1301060105	2000	5-20	12/3 SOOW	10	100'	605446
1301060106	2000	5-20	12/3 SOOW	10 with guards	100'	605447
1301060107	2000	5-15	12/3 SOOW	10 with guards	100'	605448
1301060108	2000	L5-15	12/3 SOOW	10 with guards	100'	605449
1301060109	2000	L5-20	12/3 SOOW	10 with guards	100'	605450
1301060110	2000	L5-20	12/3 SOOW	10 with guards	100'	605415
1301060111	2000	L5-15	12/3 SOOW	10 with guards	100'	605416

## Super-Safeway™ Assembled Rubber Incandescent Stringlights

**Woodhead**

- » Rain tight NEMA rating
- » #8 gauge zinc-plated steel guard
- » A21 lamp type
- » Length 100'



Mr. Model #	Lumens	NEMA Configuration	Cord Type	Description	BSE Part #
1301060097	2000	L5-15	14/3 SOOW	Lead with guard	3187868
1301070046	2000	L5-15	12/3 SOOW	Lead with guard	3187869
1301070033	2000	L5-20	12/3 SOOW	Lead with guard	605436
1301070030	2000	5-15	12/3 SOOW	Lead with guard	605099
1301070031	2000	5-15	14/3 SOOW	Lead with guard	605100
1301070032	2000	5-20	12/3 SOOW	Lead with guard	605435

## Super-Safeway™ Assembled Fluorescent Stringlights

**Woodhead**

- » Industrial duty
- » 27W and 40W fluorescent bulb type
- » Rain tight NEMA rating



Mr. Model #	Lumens	Lamp Wattage	Cord Type	Cord Length	BSE Part #
1301070035	2000	27	12/3 SOOW	90'	583194
1301070036	2970	40	12/3 SOOW	90'	583188

## Stringlights Safety Yellow® Incandescent Commercial Duty Stringlights

**Woodhead**

- » Rain tight NEMA rating
- » 120V AC, 60 Hz; 200W; A21 lamp type
- » 5000 includes Lamp-It-In-the-Box packaging to make installing bulbs a snap; 8' lead
- » Cord is 300V rated and sockets are molded to withstand hard usage
- » UL File No.: E112216



Mr. Model #	Lumens	NEMA Configuration	Cord Type	Description	Cord Length	BSE Part #
1301110027	2000	1-15	14/2 SJTW	10 per string	100'	1219024
1301110030	2000	5-15	12/3 SJTW	5 per string	50'	1218895
1301110031	2000	5-15	12/3 SJTW	10 per string	100'	1583130

## Pro-Yellow® Incandescent Stringlights

**Woodhead**

Unbeatable value for standard duty performance that stands up to hard usage.

- » Rain tight NEMA rating 1-15, excludes 130111023
- » Cord type 12/2 TC; A21 lamp type
- » Number of sockets: 10
- » Job-tough reliability and NEC and OSHA compliant



Mr. Model #	Lumens	Wattage	Cord Type	Description	Cord Length	BSE Part #
1301110023	1500	150	14/2	Pro-Yellow®	100'	1686185
1301110044	1500	150	14/2 SJTW	Pro-Yellow®	100'	2989521
1301110024	1500	150	12/2 TC	Pro-Yellow®	100'	597591
1301110026	1500	150	12/2 TC	Pro-Yellow®	100'	2642980
1301110035	1500	100	14 GA. THHN	LITE-A-SITE®	100'	605298

## Watertite® Wet Location Stringlights

### Woodhead

- » A21 lamp type
- » Tempered glass globe with #8 gauge zinc-plated steel



Mfr. Model #	Lumens	Wattage	Cord Type	Description	Cord Length	BSE Part #
<b>Incandescent</b>						
1301070039	1000	100	12/3 SOOW	3 lamps lead	25'	928329
1301070040	1000	100	12/3 SOOW	5 lamps lead	25'	928349
1301070038	1000	100	12/3 SOOW	10 lamps lead	25'	928331
<b>Fluorescent</b>						
1301070043	1800	26	12/3 SOOW	5 lamps lead	25'	928335
1301070042	1800	26	12/3 SOOW	10 lamps lead	25'	928337

## Stringlights Haztex® Hazardous Location Stringlights

### Woodhead

- » Cord is 600V rated and drops are molded rubber for the highest level of durability
- » Strings include 7.62m (25') lead to allow for connection to power outside of the hazardous area
- » Watertite® plug included
- » CSA File No.: LR39801; Hazardous Locations: Class I, Division I, Groups C and D Class II, Division I, Groups F and G Class I, Zone 1, Group IIB
- » NEMA 4X



Mfr. Model #	Lumens	Wattage	Lamp Type	Description	Cord Length	BSE Part #
<b>Incandescent</b>						
1301040040	1000	100	A21	3 drops	45'	928365
<b>Fluorescent</b>						
1301060120	1800	26	PL-C 26/41/4P	5 drops	65'	928289

## Haztex Wide-Area Portable LED Lights

### Woodhead

- » ELV and RoHS Compliant
- » Class 1 Div. 2 Groups B,C,D
- » NEMA 3R rated



Mfr. Model #	Lumens	Wattage (Max)	Connector Type	Cord Type	Cord Length	BSE Part #
1302430021	5270	20W x 4	None	14/3 SOOW	25'	3187854
1302430022	5270	20W x 4	None	14/3 SOOW	3'	3187855
1302430023	5270	20W x 4	None	12/3 SOOW	3'	3187856
1302430025	5270	20W x 4	None	14/3 SOOW	50'	3187857
1302430027	5270	20W x 4	Exp Proof NEMA 5-15	14/3 SOOW	25'	3187858
1302430028	5270	20W x 4	Exp Proof NEMA 5-15	14/3 SOOW	50'	3187859
1302430029	5270	20W x 4	Exp Proof NEMA 5-15	12/3 SOOW	3'	3187860
1302430030	5270	20W x 4	None	None	-	3187865
1302430031	5270	20W x 4	None	12/3 SOOW	3'	3187861
1302430032	5270	20W x 4	Straight Brad Power	None	-	3187866
1302430033	5270	20W x 4	None	14/3 SOOW	50'	3187862

## Incandescent Stringlight Cord Sets for Hand Lamps

### Woodhead

3, 5 and 10-lantern stringlight cord set hand lamps.



Mfr. Model #	Voltage	Cord Type	Description	Length	BSE Part #
1301060125	120V AC, 60 Hz	12/3 SOOW	10 Lantern	115'	2642865
1301060126	120V AC, 60 Hz	12/3 SOOW	5 Lantern	65'	2642959
1301060127	120V AC, 60 Hz	12/3 SOOW	3 Lantern	65'	3187867

## LED String Lights

### ProBUILT Professional Lighting

- » Energy efficient
- » Durable LED 15W polycarbonate bulb
- » No heat output
- » Protective plastic cage



Mfr. Model #	Lumens	Wattage	Description	Lighting Range	BSE Part #
111050	5500	75	5 lights per string	50'	3189642
111100	11000	150	10 lights per string	100'	3189636



Portable  
**LIGHTING**

# FLASHLIGHTS

## In this section

Flashlights ..... **21**







## Stinger DS® LED HL™ Flashlights

### Streamlight

- » IPX4 rated for water resistant operation; 1 meter impact resistance tested; 8.85" in length
- » Serialized for positive identification; LED charge-continuity indicator on charger base; compact, snap-in charger mounts in any position
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75454	640	Black	NiMH	120V AC/12V DC – 2 holders	1.25 H	3187640
75455	640	Black	NiMH	120V AC	1.25 H	3187622
75456	640	Black	NiMH	12V DC	1.25 H	3187611
75458	640	Black	NiMH	120V AC/12V DC – 1 piggyback	1.25 H	3187657
75457	640	Black	NiMH	120V AC/12V DC – FC 2 holders	1.25 H	3187665
75453	640	Black	NiMH	Without charger	1.25 H	3187588

## Stinger® Classic LED Flashlights

### Streamlight

Designed to replicate the size, shape and feel of the original model enhanced with current LED technology.

- » IPX4 rated for water resistant operation; 1 meter impact resistance tested, 7.65" in length
- » Serialized for positive identification; compact, snap-in charger mounts in any position; LED charge continuity indicator on charger base
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75662	390	Black	NiCd	120V AC/DC - 2 holders	1 H 45 M	3187601
75663	390	Black	NiCd	120V AC	1 H 45 M	3187581
75664	390	Black	NiCd	12V DC	1 H 45 M	3187579
75666	390	Black	NiCd	120V AC/DC - 1 piggyback holder	1 H 45 M	3187618
75665	390	Black	NiCd	120V AC/DC fast charger - 2 holders	1 H 45 M	3187631
75660	390	Black	NiCd	Without charger	1 H 45 M	3187559
75675	390	Black	NiMH	12V DC	1 H 45 M	3187578
75661	390	Black	NiMH	Without charger	1 H 45 M	3187560

## Stinger® Flashlights

### Streamlight

Lightweight, powerful, safety-rated, rechargeable flashlight with durable aluminum construction, that makes it virtually indestructible.

- » Durable aluminum body; rechargeable NiCd or NiMH
- » Fast charger and piggyback options available; 7.38" in length
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Includes	Run Time (Max)	BSE Part #
75014	90	Black	AC/DC - 2 holders	1 H 15 M	1927973
75002	90	Black	AC/DC - 2 holders	1 H 15 M	1927968
75000	90	Black	Without charger	1 H 15 M	1927966
75068	-	Black	12V DC NiMH battery	1 H 15 M	3187549
75161	-	Black	Without charger	1 H 15 M	3187544

## Stinger DS® LED HP™ Flashlights

### Streamlight

Powerful and light-duty, throws a long, far-reaching, bright white beam that illuminates whatever is way up ahead, whether it's at the end of an alley or up on a ledge.

- » Dual switches; 9.65" in length
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75863	350	Black	NiCd	AC/DC — 2 holders	2 H	3187632
75861	350	Black	NiCd	120V AC charger	2 H	3187617
75862	350	Black	NiCd	12V DC charger	2 H	3187603
75899	350	Black	NiMH	12V DC	2 H	3187602
75882	350	Black	NiCd	AC/DC - PiggyBack® charger	2 H	3187646
75885	350	Black	NiCd	AC/DC - fast charger	2 H	3187658
75860	350	Black	NiCd	Without charger (NiCd)	2 H	3187585
75900	350	Black	NiMH	Without charger (NiMH)	2 H	3187584
75980	350	Black	NiMH	Without charger	2 H	3187588

## Stinger® LED HL™ Rechargeable Flashlights

### Streamlight

More lumens for more brightness and a wider beam that lights up a whole area from side to side.

- » 1 meter impact resistance tested; IPX4 rated for water resistant operation; 8.41" in length
- » LED charge-continuity indicator, compact; anti-roll ring included
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75430	640	Black	NiMH	120V AC/12V DC – 2 holders	1.25 H	3187626
75431	640	Black	NiMH	120V AC	1.25 H	3187604
75432	640	Black	NiMH	12V DC	1.25 H	3187596
75434	640	Black	NiMH	120V AC/12V DC – 1 piggyback	1.25 H	3187644
75433	640	Black	NiMH	120V AC/12V DC – FC 2 holders	1.25 H	2990743
75429	640	Black	NiMH	Without charger	1.25 H	3187573

## Stinger® LED Rechargeable Flashlights

### Streamlight

For the broadest range of lighting needs at the best value.

- » 1 meter impact resistance tested
- » IPX4 rated for water resistant operation; 8.41" in length
- » LED charge-continuity indicator, compact; anti-roll ring included
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75713	350	Black	NiCd	120V steady charge AC/DC -2 holders	2 H	2047982
75711	350	Black	NiCd	120V AC only	2 H	2047977
75712	350	Black	NiCd	12V DC	2 H	2047978
75735	350	Black	NiCd	120V AC/DC fast charger - 2 holders	2 H	2047990
75710	350	Black	NiCd	Without charger	2 H	2047975
75732	350	Black	NiCd	AC/12V DC steady charge piggyback	2 H	2047986
75960	350	Black	NiMH	Without charger	2 H	3187554
75753	350	Black	NiMH	12V DC steady charge	2 H	3187577

## Stinger® LED HP Rechargeable Flashlights

### Streamlight

Long-range flashlight shines farther at 473 meters with 56,000 candela peak beam intensity.

- » 3 meter impact resistance tested
- » IPX4 water-resistant; 9.23" in length
- » Serialized for positive identification
- » LED charge-continuity indicator, compact; anti-roll ring included
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75763	350	Black	NiCd	AC/DC — 2 holders	2 H	3187619
75761	350	Black	NiCd	AC	2 H	3187600
75762	350	Black	NiCd	DC (NiCd)	2 H	3187590
75799	350	Black	NiMH	12V DC	2 H	3187589
75785	350	Black	NiCd	120V AC/12V DC fast charge	2 H	3187647
75782	350	Black	NiCd	120V AC/12V DC with piggyback	2 H	2866278
75760	350	Black	NiCd	Without charger	2 H	2468798

**Don't forget to order batteries.** Find them on page 52.



NOTES



## Stinger DS® LED Rechargeable Flashlights

### Streamlight

Designed for the broadest range of lighting needs at the best value.

- » 1 meter impact resistance tested
- » IPX4 rated for water resistant operation
- » Serialized for positive identification; 8.85" in length
- » LED charge-continuity indicator, compact; anti-roll ring included
- » Snap-in charger holder that mounts in any position
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75813	350	Black	NiCd	120V AC/DC with steady charge	2 H	2752701
75811	350	Black	NiCd	12V AC/DC steady charge	2 H	3187599
75832	350	Black	NiCd	12V AC/DC steady charge piggyback®	2 H	3080402
75835	350	Black	NiCd	AC/DC fast charge	2 H	3187645
75812	350	Black	NiCd	12V DC steady charge—(NiCd)	2 H	3187586
75853	350	Black	NiMH	12V DC steady charge	2 H	3187587
75970	350	Black	NiMH	Without charger	2 H	3187567
75810	350	Black	NiCd	Without charger	2 H	3187566

## UltraStinger® Flashlights

### Streamlight

The brightest Streamlight flashlight available, providing up to 75,000 candlepower.

- » 1 meter impact resistance tested
- » IPX4 rated for water resistant operation
- » Serialized for positive identification; 11.75" in length
- » Most models meet applicable European Community directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
78014	230	Black	NiCd	AC/DC - 2 holders	1 H	1928117
78500	230	Black	NiMH	Without charger	1 H	3187563
78000	230	Black	NiCd	Without charger	1 H	1928087

## PolyStinger® DS LED Rechargeable Flashlights

### Streamlight

Intense brightness, long-range, rechargeability and long run time in a durable nylon polymer housing plus dual full-function switches, one in the tailcap and one on the head.

- » 2 meter impact resistance tested
- » IPX4 rated design; water resistant operation
- » Serialized for positive identification; 8.64" in length
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1, Class II, Div. 2, Grp G T3
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
76810	385	Black	NiCd	Without charger	2 H	3187564
76813	385	Black	NiCd	120V AC/DC 2 holders	2 H	3187612
76832	385	Black	NiCd	120V AC/DC 1 piggyback holder	2 H	3187623
76835	385	Black	NiCd	120V AC/DC fast charge—2 holders	2 H	3187633
76849	385	Black	NiMH	12V DC NiMH battery	2 H	3187582
76850	385	Black	NiMH	Without charger - NiMH battery	2 H	3187565
76811	385	Black	NiCd	120V AC	2 H	3187594
76812	385	Black	NiCd	12V DC	2 H	3187583

NOTES





## PolyStinger® LED Rechargeable Flashlights

### Streamlight

Intense brightness, long-range, rechargeability and long run time in a durable nylon polymer housing plus dual full-function switches, one in the tailcap and one on the head.

- » 3 meter impact resistance tested
- » IPX4 water- resistant
- » Serialized for positive identification; 8.07" in length
- » LED charge-continuity indicator, compact
- » Snap-in charger holder that mounts in any position
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1, Class II, Div. 2, Grp G T3
- » Meets applicable European Community Directives




Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
76163	385	Yellow	NiMH	120V AC/DC with steady charge	2 H	2699792
76113	385	Black	NiMH	120V AC/DC 2 holders	2 H	2475759
76112	385	Black	NiCd	12V DC	2 H	3187571
76161	385	Yellow	NiCd	120V AC	2 H	3187580
76162	385	Yellow	NiCd	12V DC	2 H	3187569
76199	385	Yellow	NiMH	12V DC	2 H	3187570
76111	385	Black	NiCd	120V AC with steady charge	2 H	2595529
76182	385	Yellow	NiCd	120V AC/DC with steady charge and piggyback	2 H	2867467
76149	385	Black	NiMH	12V DC	2 H	3187572
76132	385	Black	NiCd	120V AC/DC 1 piggyback holder	2 H	3187616
76185	385	Yellow	NiCd	120V AC/DC fast charge —2 holders	2 H	3187624
76135	385	Black	NiCd	120V AC/DC fast charge —2 holders	2 H	3187625
76166	385	Yellow	NiCd	120V AC/DC fast charge —1 piggyback holder	2 H	3187629
76116	385	Black	NiCd	120V AC/DC fast charge —1 piggyback holder	2 H	3187630
76160	385	Yellow	NiCd	Without charger	2 H	3187552
76203	385	Yellow	NiMH	Without charger	2 H	3187551
76110	385	Black	NiCd	Without charger	2 H	3187553
76150	385	Black	NiMH	Without charger	2 H	3187550

## Stinger® Lite Pipe™ Work Lights

### Streamlight

This ultra-thin rechargeable work light has a removable, rotating hook, so it can hang almost anywhere. It's so thin, it fits into tight spots to get light right where it's needed.

- » 1 meter impact resistance tested; serialized for positive identification
- » IPX4 rated for water resistant operation; 19.62" in length
- » LED charge-continuity indicator on charger base
- » Compact, snap-in charger mounts in any position
- » UL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » cUL Listed: Class I, Div. 2, Grps A,B,C,D T1 Class II, Div. 2, Grp F,G T3
- » Meets applicable European Community Directives

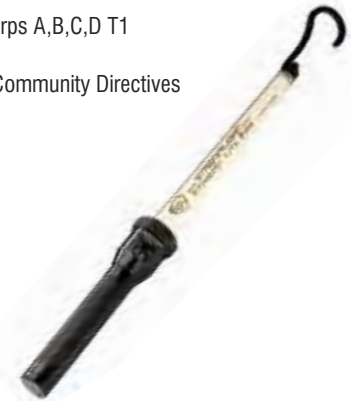

Mfr. Model #	Lumens	Color	Battery Type	Includes	Run Time (Max)	BSE Part #
75650	220	Black	NiCd	Without charger	3 H 15 M	3187547
75684	220	Black	NiCd	120V AC/DC - 2 holders	3 H 15 M	3187591
75685	220	Black	NiMH	120V AC/DC - 2 holders	3 H 15 M	3187592
75651	220	Black	NiMH	Without charger	3 H 15 M	3187548
75652	220	Black	NiCd	120V AC (NiCd)	3 H 15 M	3187574
75654	220	Black	NiCd	120V AC/DC - 1 piggyback holder	3 H 15 M	3187605

NOTES

FLASHLIGHTS

## Waypoint® Rechargeable Pistol Grip Spotlights

### Streamlight

Has a broader, wider beam than the original Waypoint.

- » 2 meter submersion for a period of 30 minutes
- » Integrated stand for hands-free scene lighting; removable lanyard
- » 6.75" in length
- » Broad, wide beam
- » Includes 120V AC charge cord
- » Most models meet applicable European Community Directives



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
44910	300	Yellow	5 H	3003112
44911	300	Black	5 H	3097635

## Waypoint® Non-Rechargeable Pistol Grip Spotlights

### Streamlight

C4® LED that produces 115,000 candela peak beam intensity.

- » 1 meter impact resistance tested
- » Integrated stand for hands-free scene lighting; removable lanyard
- » IPX4; water resistant
- » 6.75" in length
- » LED solid state power regulation provides maximum light output throughout battery life
- » Operates using battery or 12V DC power cord
- » Uses C alkaline batteries (sold separately)
- » Includes 120V DC power cords
- » Most models meet applicable European Community Directives



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
44904	210	Yellow	8 H 30 M	3187540
44905	210	Black	8 H 30 M	3187541

## Survivor® LED Flashlights

### Streamlight

One of the brightest, right-angle LED flashlights in the world.

Class I, Div. 1 rated.

- » 2 meter impact resistance tested
- » IPX4 rated design; water resistant
- » 7.06" in length
- » UL Listed: Class I Div.1 Grps C&D T4 Class I, Div. 2, Grps. A,B,C,D T4 Class II, Div. 2 Grps. F,G; Class III T4
- » cUL Listed: Class I Div.1 Grps C&D T4 "Exia" Class I, Div. 2, Grps. A,B,C,D T4 Class II, Div. 2 Grps. F,G; Class III T4
- » ATEX: FTZU 06 ATEX 0285X II 1G "exia" IIB T4 (Alkaline Only) II 2G Ex e ib IIB T4
- » MSHA: Permissible Flashlight Tested for Intrinsic Safety in Mixtures Methane/air only. Appr. No. 20-A100001-0
- » N: Br-Ex ia IIB T4 / BR-Ex e ib IIB T4 UL-BR 10.0029 (Exclusive/Emertech)
- » NFPA: Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position
- » Meets applicable European Community Directives



Mfr. Model #	Lumens	Color	Includes	Run Time (Max)	BSE Part #
90513	140	Yellow	Charger/holders and AC/DC cords	3 H 30 M	3187614
90512	140	Yellow	AC fast charger	3 H 30 M	3187636
90519	140	Yellow	DC fast charger	3 H 30 M	3187634
90510	140	Yellow	Without charger	3 H 30 M	3187561
90503	140	Orange	Charger/holders and AC/DC cords	3 H 30 M	3187613
90502	140	Orange	AC fast charger	3 H 30 M	3187635
90509	140	Orange	DC fast charger	3 H 30 M	3187637
90540	140	Orange	Alkaline	4 H	3187537
90500	140	Orange	Without charger	3 H 30 M	2390677
90523	140	Black	Charger/holders and AC/DC cords	3 H 30 M	3187615
90522	140	Black	AC fast charger	3 H 30 M	3187638
90528	140	Black	DC fast charger	3 H 30 M	3187639
90520	140	Black	Without charger	3 H 30 M	3187562
90545	140	Black	Alkaline	4 H	3187538
90541	140	Yellow	Alkaline	4 H	2970240

## Knucklehead® LED Floodlights

### Streamlight

A lightweight, rechargeable, hand-held work light that floods an entire work area with light. Includes an articulating head and features multiple attachment methods and the latest in dual C4® power LED technology.

- » 2 meter impact resistance tested
- » IPX4 rated for water resistant operation
- » All openings O-ring sealed, includes clip
- » Serialized for positive identification
- » 9.2" in length
- » Dual C4 LED technology for extreme brightness
- » Full 360° rotation head with 210° of articulation
- » Removable magnet with 135 lb pull strength
- » NFPA: Rack meets requirements of 1901-14.1.11.2 (2003) mounted in any position
- » USTC: Class I, Div. 2, Grps A, B, C, D  
Class II, Div. 2, Grps F, G Class III T4



## Knucklehead® Rechargeable Worklights

### Streamlight

A lightweight, rechargeable, hand-held work light that floods an entire work area with light. Includes an articulating head and features multiple attachment methods and the latest in dual C4® power LED technology.

- » 2 meter impact resistance tested
- » IPX4 rated for water resistant operation
- » Serialized for positive identification
- » 9.2" in length
- » Removable magnet with 135 lb pull strength and integrated hook; all openings O-ring sealed, includes hook
- » Dual C4 LED technology for extreme brightness
- » Full 360° rotation head with 210° of articulation
- » NFPA: Rack meets requirements of 1901-14.1.11.2 (2003) mounted in any position
- » UL Listed: Class I, Div. 2, Grps A, B, C, D  
Class II, Div. 2, Grps F, G Class III T4



Mfr. Model #	Lumens	Color	Includes	Run Time (Max)	BSE Part #
90657	200	Orange	Clip 120V AC/12V DC	3 H 30 M	2978198
90670	200	Orange	12V DC fast charge	3 H 30 M	3187671
90661	200	Orange	120V AC charger/holder	3 H 30 M	2872826
90651	200	Orange	Without charger	3 H 30 M	3187597
90644	200	Orange	Alkaline	3 H 30 M	2872825



Mfr. Model #	Lumens	Color	Includes	Run Time (Max)	BSE Part #
90621	200	Yellow	Without charger	3 H 30 M	2726478
90642	200	Yellow	Alkaline	3 H 30 M	2669252
90622	200	Yellow	120V AC with AC/DC charger holders	3 H 30 M	2669287
90607	200	Black	Charger/holder and 120V AC & DC cords	3 H 30 M	3187649
90631	200	Yellow	120V AC fast charge	3 H 30 M	2778515
90602	200	Black	120V AC charger/holder	3 H 30 M	3187641
90606	200	Black	12V DC	3 H 30 M	3187643
90601	200	Black	Without charger	3 H 30 M	2726477
90613	200	Black	120V AC/DC PiggyBack	3 H 30 M	3187674
90641	200	Black	Alkaline	3 H 30 M	2726479
90627	200	Yellow	120V AC and DC	3 H 30 M	3187648
90626	200	Yellow	12V DC	3 H 30 M	3187642
90633	200	Yellow	120V AC/DC PiggyBack	3 H 30 M	3187673
90611	200	Black	120V AC fast charge	3 H 30 M	3187668
90620	200	Black	12V DC fast charge	3 H 30 M	3187670
90640	200	Yellow	12V DC fast charge	3 H 30 M	3187669

NOTES

FLASHLIGHTS

# Portable LIGHTING

## Knucklehead® HAZ-LO Flood LED Worklights

### Streamlight

- » 2 meter impact resistance tested
- » IPX4 water-resistant; 9.2" in length
- » Full 360° rotation head with 210° of articulation
- » Serialized for positive identification
- » Removable magnet with 135 lb. pull strength
- » NFPA: Rack meets requirements of 1901-14.1.11.2 (2003) mounted in any position
- » USTC: Class I, Div. 2, Grps A, B, C, D, Class II, Div. 2, Grps F, G, Class III T3C



Mfr. Model #	Lumens	Color	Includes	Run Time (Max)	BSE Part #
91627	163	Yellow	120V AC/12V DC	3 H 45 M	3187659
91657	163	Orange	120V AC/12V DC	3 H 45 M	3187660
91622	163	Yellow	120V AC	3 H 45 M	3187653
91652	163	Orange	120V AC	3 H 45 M	3187654
91621	163	Yellow	Without charger	3 H 45 M	3187607
91651	163	Orange	Without charger	3 H 45 M	3187608
91642	163	Yellow	Alkaline	3 H 45 M	3187555
91644	163	Orange	Alkaline	3 H 45 M	3187556

## 2AA ProPolymer® LED Flashlights

### Streamlight

Impact and shock resistant LED flashlight that provides 20 hours of run time.

- » 1 meter impact resistance tested; waterproof to 1 meter for 1 hour
- » IP57 rated design; dust and water ingress protected in accordance with specification EN60529:1992
- » O-ring sealed construction; 6.3" in length
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Group F&G; Class III, T4; ATEX: II 3G Ex ic IIC T5 FTZU 09 ATEX 0265X
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
67100	20	Black	2 AA (included)	20 H	2438943

## 2AA ProPolymer® HAZ-LO Flashlights

### Streamlight

Tough, super-convenient, extra bright flashlight. Now with a push button tail switch.

- » Impact resistant housing – drop test verified
- » Push button tail switch; 6.3" in length
- » Tough, super-convenient, extra bright flashlight
- » UL: Class I, Div. 1, Groups C, D Class I, Div 2, Groups A, B, C, D Class II, Div. 2, Group F, G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Group F, G Class III, T3C
- » MSHA: Permissible Flashlight Tested for Safety in Methane/air only Appr. No. 10C-648-0
- » ATEX: II 2G Ex e ib IIB T5 SEV 07 ATEX 0120
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
67201	126	Yellow	2 AA (included)	4 H 30 M	3144605
67101	20	Yellow	2 AA (included)	20 H	2371137

## 3N Lux® ProPolymer® HAZ-LO DIV 1 LED Flashlight

### Streamlight

Extremely lightweight, alkaline battery-powered personal light features three ultra-bright LEDs.

- » Waterproof and non-conductive; corrosion proof
- » 5.25" in length
- » UL: Intrinsic Safety for Haz. Loc. Class I, II, Div. 1, Groups A,B,C,D,E,F,G; Class III, T4A Classified
- » cUL: Intrinsic Safety for Haz. Loc. "Exia" Class I, II, Div. 1, Groups A,B,C,D,E,F,G ;Class III, T4A "Exia"; ATEX: II 1G EEx ia IIC T4 DEMKO 04 ATEX 0406954
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
62202	30	Yellow	3 "N" (included)	120 H	1927869
62302	30	Black	3 "N" (included)	120 H	1927871



### 3AA ProPolymer® HAZ-LO LED Flashlights

#### Streamlight

A strong beam and a body that is resistant to chemicals and solvents.

- » IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes; IPX4 for water spray
- » Corrosion proof, anti static and non-conductive
- » Integrated and retained facecap lock; 7" in length
- » UL: Cl. I, Div.1 Gr.ABCD T4 Cl. II, Div.1 Gr.E,F,G. Cl. III, T4 "Classified"
- » cUL: Cl. I, Div.1 Gr. ABCD T4Cl. II, Div.1 Gr.E,F,G. Cl. III, T4 "Exia"
- » ATEX: II 1G Ex ia IIC T4 DEMKO 13 ATEX 1214468



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68720	120	Yellow	3 AA (included)	6 H 30 M	3187525
68721	120	Black	3 AA (included)	6 H 30 M	3187528
68722	120	Orange	3 AA (included)	6 H 30 M	3187527
68723	120	Yellow	3 AA (included)	6 H 30 M	3187526
68724	120	Black	3 AA (included)	6 H 30 M	3187529

### 4AA ProPolymax® LED Flashlights

#### Streamlight

Compact, waterproof, non-conductive polymer body.

- » 3 meter impact resistance tested; IP67 rated for dust-tight and waterproof to 1 meter for 30 minutes
- » IPX4 for water spray
- » TEN-TAP™ programmable switch allows user to select one of three different programs
- » Nonconductive and corrosion proof; 7" in length
- » UL: Class I, Div. 1, Groups C, D Class I, Div 2, Groups A, B, C, D Class II, Div. 2, Group F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Group F&G Class III, T3C
- » MSHA: Permissible Flashlight Tested for use in Methane/air only. Appr. No. 10C-658-0
- » ATEX: II 2GD EEx ib e IIB T4 SNCH 04 ATEX 3639 IP65 (T74C)
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68820	300	Yellow	4 AA (included)	2 H 45 M	3187531
68821	300	Black	4 AA (included)	2 H 45 M	3187533
68822	300	Orange	4 AA (included)	2 H 45 M	3187532

### 4AA ProPolymer® LED Div 1 Flashlights

#### Streamlight

Impact-and shock-resistant LED projects a soft, diffused wide area of light and provides 155 hours of run time.

- » 6.5" in length
- » UL: Class I, Div. 1, Groups C, D; Class I, Div 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » MSHA: Permissible Flashlight App. No. 10C-658-0 Tested for use in methane-air mixtures only
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68202	67	Yellow	4 AA (included)	155 H	1720934
68302	67	Black	4 AA (included)	155 H	1927927

### 4AA ProPolymer® Lux Div 2 Flashlights

#### Streamlight

Provides a longer reaching, brighter beam. Ergonomically shaped for maximum hand comfort.

- » 7" in length
- » UL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C (142 C)
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C (142 C)
- » NFPA: Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68244	100	Yellow	4 AA (included)	6 H	1739336
68344	100	Black	4 AA (included)	6 H	1927915

## 4AA ProPolymer® Lux Div 1 Flashlights

### Streamlight

Provides a longer reaching, brighter beam. Ergonomically shaped for maximum hand comfort.

- » 7" in length
- » UL: Class I, Div. 1, Groups C, D; Class I, Div 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » MSHA: Permissible Flashlight App. No. 10C-658-0 Tested for use in methane-air mixtures only
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68602	100	Yellow	4 AA (included)	6 H	2025785
68702	100	Black	4 AA (included)	6 H	2025786

## 3C ProPolymer® LED Flashlights

### Streamlight

Impact-and shock-resistant LED flashlight projects a soft diffused wide area of light and provides 336 hours of run time.

- » 8.55" in length
- » UL: Class I, Div. 1, Group D; Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » MSHA: Permissible Flashlight App. No. 10C-658-0 Tested for use in methane-air mixtures only
- » ATEX: II 2GD EEx ib e IIB T4 SNCH 04 ATEX 3640X IP65 (T70C)
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
33202	85	Yellow	3 C (sold separately)	336 H	1720935
33302	85	Black	3 C (sold separately)	336 H	1927790

## 4AA ProPolymer® Xenon Flashlights

### Streamlight

Compact, waterproof, non-conductive polymer body.

- » 6.5" in length
- » UL: Class I, Div. 1, Groups C, D Class I, Div 2, Groups A, B, C, D Class II, Div. 2, Group F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D Class II, Div. 2, Group F&G Class III, T3C
- » MSHA: Permissible Flashlight Tested for use in Methane/air only. Appr. No. 10C-658-0; ATEX: II 2GD EEx ib e IIB T4 SNCH 04 ATEX 3639 IP65 (T74C)
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
68254	34	Yellow	4 AA (sold separately)	4 H	1927924

## 3C ProPolymer® HAZ-LO LED Flashlights

### Streamlight

Intrinsically safe, high performance, 3 "C" Alkaline powered C4® LED flashlight that carries a strong beam.

- » IP67, IPX4 rated
- » Push button tail switch; 9.3" in length
- » UL: Class I, Div. 1, Group D; Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C; ATEX: II 1G Ex ia IIC T4 Ga II 1D Ex ia IIIC T99° FTZU 11 ATEX 0183X
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
33820	150	Yellow	3 C (sold separately)	18 H	3158308
33822	150	Orange	3 C (sold separately)	18 H	3187534



### 3C ProPolymer® Xenon Flashlights

#### Streamlight

Impact-and shock-resistant LED flashlight projects a soft diffused wide area of light and provides 336 hours of run time.

- » 8.55" in length
- » UL: Class I, Div. 1, Group D; Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » MSHA: Permissible Flashlight App. No. 10C-658-0 Tested for use in methane-air mixtures only
- » ATEX: II 2GD EEx ib e IIB T4 SNCH 04 ATEX 3640X IP65 (T70C)
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
33254	50	Yellow	3 C (sold separately)	5 H 30 M	1927788

### 3C Lux® ProPolymer® Div 2 LED Flashlights

#### Streamlight

Impact-and shock-resistant LED flashlight projects a soft diffused wide area of light and provides 336 hours of run time.

- » 9.3" in length
- » UL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » cUL: Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
33242	44	Yellow	3 C (sold separately)	5.5 H	3187523
33342	44	Black	3 C (sold separately)	5.5 H	3187524

### 3C Lux® ProPolymer® Div 1 LED Flashlights

#### Streamlight

Impact-and shock-resistant LED flashlight projects a soft diffused wide area of light and provides 336 hours of run time.

- » 9.3" in length
- » UL: Class I & II, Div. 1, Groups C, D, F&G Class I, Div.2, Grps A,B,C,D. Class III, T4
- » cUL: Class I & II, Div. 1, Groups C, D, F&G Class III, T4 "Exia" Non-Incendive: CL.I Div.2 Gr. ABCD
- » MSHA: Permissible Flashlight Tested for use in Methane/air only Appr. No. 20-A060001-0
- » CE: Meets applicable European Community Devices



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
33602	44	Yellow	3 C (sold separately)	4 H	2025783
33702	44	Black	3 C (sold separately)	4 H	2025784

### PolyTac® LED Tactical Lights

#### Streamlight

A versatile right-angle compact tactical flashlight that can clip onto turn-out gear or onto our elastic head strap for a headlamp. It's super-bright, can be operated easily with gloves and is encased in a durable nylon polymer housing.

- » 5.34" in length
- » IPX7 rated design; waterproof to 1 meter for 30 minutes
- » C4® LED, with a 50,000 hour lifetime
- » Includes integrated clip and foldable hook
- » Top-mounted switch for easy on/off



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
88850	275	Black	3V CR123A lithium batteries (x2)	3 H	2775773
88851	275	Coyote	3V CR123A lithium batteries (x2)	3 H	3187522
88853	275	Yellow	3V CR123A lithium batteries (x2)	3 H	2575769

## PolyTac® LED HP™ Flashlights

### Streamlight

275 lumens on high and the durable nylon polymer housing is tougher than ever with a surer, more rugged grip.

- » IPX7 rated design; waterproof to 1 meter for 30 minutes
- » 5.9" in length
- » LED solid state power regulation provides maximum light output throughout battery life



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
88860	275	Black	3V CR123A lithium batteries (x2)	3 H	3173781
88861	275	Coyote	3V CR123A lithium batteries (x2)	3 H	3187535
88863	275	Yellow	3V CR123A lithium batteries (x2)	3 H	3128604

## Stylus Reach® LED Flashlights

### Streamlight

Features a 7" flexible cable that allows light in the tightest spots.

- » IPX4 rated
- » 14" in length
- » 3 "AAAA" batteries



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
65612	11	Silver	White	24 H	1927896
65618	11	Black	White	24 H	1927898
65658	11	Black - UL Listed	White	24 H	1927928

## Stylus Reach 18® LED Flashlights

### Streamlight

LED pen light with 18" flexible cable.

- » 25.5" in length
- » IPX4 rated
- » 3 "AAAA" batteries



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
65418	11	Black	White	24 H	1720927

## Stylus Pro Reach® 2AAA LED Pen Lights

### Streamlight

8" PVC cable which provides 14" of reach, allows for an intense light right where it's needed.

- » 1 meter impact resistance tested; IPX4 rated for water resistant operation
- » C4® LED technology for extreme brightness; all openings O-ring sealed; 14.6" in length
- » 8" (20.32 cm) flexible polyethylene-coated extension cable allows for 14" (35.56 cm) of reach
- » Removable pocket clip and magnetic clip - mount in virtually any position for hands-free use
- » Tail clip stows cable folding light to about the size of a marker; conveniently fits in shirt pocket
- » IPX4 rated



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
66418	38	Matte black	8 H	3082125

## Jr. Reach LED Flashlights

### Streamlight

With the ultra-bright, long-beam, C4® LED mounted on a flexible cable and the magnetic clip for easy mounting, this handy light can go almost anywhere and see anything.

- » 20" in length
- » Includes extension cable that allows for 14" of reach
- » Next generation C4 LED technology, impervious to shock with a 50,000 hr lifetime
- » Flexible cable protected by a durable PVC coating



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
71600	85	Black	2 AA (included)	3 H 15 M	1927936

## Stylus Pro® USB Rechargeable Penlights

### Streamlight

Rechargeable penlight conveniently charges via USB connector to a wall or computer.

- » IPX4 water-resistant; 1 meter impact resistance tested
- » Removable pocket clip; 6.15" in length
- » O-ring sealed, sliding cover protects the micro USB charging port



Mfr. Model #	Lumens	Color	Run Time	Includes	BSE Part #
66133	70	Black	3 H 30 M	-	3187536
66134	70	Black	3 H 30 M	USB cord	3218391





## MicroStream® LED Pen Flashlights

### Streamlight

High flux LED light with proprietary micro optical systems has battery-booster electronics to provide a super-bright beam.

- » IPX4 rated; corrosion and waterproof construction
- » Includes 1 AAA alkaline battery and nylon holster; 3.6" in length
- » Internal polymer body liner and shock proof switch housing allow for operation under the most extreme conditions
- » O-ring sealed and rubber push-button tail cap switch
- » Proprietary micro optical system (MOS) for optimized output and runtime
- » Shock-proof; drop test verified above the industry standard of 6'
- » Type II MIL-SPEC abrasion and corrosion-resistant anodized aircraft aluminum
- » Unbreakable pocket clip and polycarbonate lens



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
66318	35	Black	2 H 15 M	2323129

## Stylus Pro® LED Flashlights

### Streamlight

The hallmarks of this light are its compact durable construction, optimum beam output and a tailswitch for single-handed operation.

- » IPX4 rated for water resistant operation
- » O-ring sealed; 5.3" in length
- » One meter impact resistance tested
- » Removable pocket clip
- » Tear-resistant nylon holster and polycarbonate lens
- » Pushbutton tail switch



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
66118	65	Matte black	White	6 H 30 M	2323131
66120	65	Red	White	6 H 30 M	2772035
66121	65	Silver	White	6 H 30 M	3077587
66122	65	Blue	White	6 H 30 M	2733047

## Stylus® LED Flashlight

### Streamlight

This ultra slim penlight is waterproof, with a silver aluminum body, ridged grip and pocket clip.

- » High intensity 5mm LED; 6.21" in length
- » Battery size: (3) AAAA
- » Impervious to shock with a 100,000 hour lifetime
- » Features a momentary blink switch and constant "on"
- » Stylus 65058 is UL listed



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
65006	2	Black	Red	24 H	1927901
65012	11	Silver	White	24 H	1927902
65016	2	Silver	Blue	24 H	1927903
65018	11	Black	White	24 H	1720926
65020	7	Black	Green	24 H	1927888
65022	2	Black	Blue	24 H	1927904
65024	11	Gold	White	24 H	1927889
65035	11	Red	White	24 H	1927881
65050	11	Blue	White	24 H	1927882
65058	11	Black	White	24 H	1927883
65069	-	Black	NM UV	24 H	1927861
65075	7	Camo	Green	24 H	3187519
65080	11	US Flag	White	24 H	1927893
65186	-	Olive drab	IR	24 H	3187518

## Twin-Task® 3C LED Flashlights

### Streamlight

Versatile, long-running, go-anywhere light cuts through the dark with extreme brightness.

- » IPX4 rated for water resistant operation
- » 1 meter impact resistance tested
- » All openings O-ring sealed; 9.02" in length
- » 3 lighting modes



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51039	180	Matte black	3 C (sold separately)	28 H	2921098

## Twin-Task® 3C-UV LED Flashlights

### Streamlight

Features three lighting modes and the latest in LED technology.

- » IPX4 rated for water-resistant operation
- » Unbreakable polycarbonate lens; 9.02" in length
- » All openings are O-ring sealed
- » Wrist lanyard



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51045	185	Matte black	3 C (sold separately)	27 H	3079380

## Twin-Task® 3AA LED Flashlights

### Streamlight

Versatile, long-running, go-anywhere light cuts through the dark with extreme brightness.

- » 1 meter impact resistance tested
- » IPX4 rated for water-resistant operation
- » All openings O-ring sealed; 8.54" in length
- » Wrist lanyard and 2 lighting modes



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51038	100	Matte black	3 AA (included)	5 H 45 M	3077309

## Twin-Task® 3AAA Laser LED Flashlights

### Streamlight

Features a laser pointer and the latest in LED technology.

- » IPX4 rated for water resistant operation
- » Unbreakable polycarbonate lens and wrist lanyard
- » All openings are O-ring sealed; 5.38" in length
- » Push-button on/off sequences through: laser only; C4® LED; laser/C4® LED combo; five ultra-bright white LEDs
- » Laser output usable range of 100 yards+ when using laser pointer only



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51043	100	Matte black	3 AAA (included)	2 H 45 M	3075657

## Task-Light® 3AA LED

### Streamlight

The long life of an LED with the longer range and brighter beam of a conventional high-powered flashlight.

- » Durable with an anodized aluminum body, enhanced knurled grip
- » Lanyard included
- » O-ring sealed for water-resistance; 8.6" in length
- » Unbreakable polycarbonate lens and textured parabolic reflector
- » Push button headswitch



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51006	95	Black	3 AA (included)	18 H	1927843
51016	95	Titanium	3 AA (included)	18 H	1927886

## Twin-Task® 1L LED Flashlights

### Streamlight

Lightweight lithium battery-powered flashlight features dual lighting modes.

- » 1 meter impact resistance tested
- » IPX4 rated for water resistant operation
- » All openings O-ring sealed; 4.09" in length
- » Polycarbonate lens
- » Uses one 3V CR123A lithium battery



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51036	98	Matte black	Lithium	2 H 15 M	2926588

## Twin-Task® 2L LED Flashlights

### Streamlight

The same great features as the Twin-Task 1L LED with added brightness, run time and reach.

- » 1 meter impact resistance tested
- » IPX4 rated for water-resistant operation
- » All openings O-ring sealed; 5.43" in length
- » Wrist lanyard and polycarbonate lens
- » Uses two 3V CR123A lithium battery



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
51037	120	Matte black	Lithium	4 H	3187521

## Jr. LED Flashlights

### Streamlight

C4® LED, with a 50,000 hour lifetime.

- » Push-button tailcap for steady on and momentary on/off; 6.5" in length
- » Shock- and water-resistant; ultra small: lightweight, only 4.1 oz



Mfr. Model #	Lumens	Color	Battery Type	Run Time	BSE Part #
71500	85	Black	2 AA (included)	4 H	1720931

## THE LOGO® Keychains

### Streamlight

This little keychain light weighs less than half an ounce with batteries.

- » High, medium or low modes, it automatically turns itself off after 6 minutes, but it flashes a warning first; 1.8" in length
- » Has three light levels, plus a blink mode (which will flash for 45 hours)



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
73100	10	Black	45 H	3187511

## Key-Mate Chain Lights

### Streamlight

The smallest, brightest 1 ounce LED flashlight available. Super bright, tough and remarkably handy. Offers 400% more lighting range than a penlight and reflector optics that enhance the brightness of the LED.

- » Convenient breakaway lanyard and clip make it ideal for on the go
- » Runs longer and stays brighter than any other button cell powered keychain LED light; 2.36" in length
- » Super-bright 100,000-hour LED
- » Versatile, powder-coated spring steel pocket clip
- » 72016 - Combo kit includes red and green filters and lanyard



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
72001	10	Black	White	96 H	1720928
72101	10	Titanium	White	96 H	1927947
72003	10	Black	Green	96 H	1927937
72203	10	Camo	Green	96 H	3187516
72016	10	Black	White	96 H	1927940

## Nano Light® LED Key Chain Lights

### Streamlight

Truly tiny, the Nano Light is a weatherproof, personal flashlight featuring a 100,000 hour life LED.

- » 1.47" in length
- » Includes a non-rotating snap hook for easy one-handed operation when attached to a keychain



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
73001	10	Black	White	8 H	2323128
73002	10	Blue	White	8 H	3187514
73003	10	Pink	White	8 H	2752369
73005	10	Red	White	8 H	3187515
73006	10	Orange	White	8 H	3187513
73007	10	Coyote	White	8 H	3187512

## CREE LED Flashlights with Anti-Roll Head and Turbo-Strobe

### FoxFury

Waterproof and impact resistant light features a tactical switch.

- » Front strike bezel and lanyard
- » Runs on two CR123 lithium batteries or one rechargeable 18650 battery and can be worn via the included nylon holster
- » Square anti-roll head



Mfr. Model #	Lumens	Length	Run Time	BSE Part #
940-010	220	125 mm	7 H	2866627
920-310	600	147 mm	3 H 30 M	3187383

## UV LED Flashlights For Security Use

### FoxFury

Waterproof and impact resistant light features a tactical switch.

- » Front strike bezel and lanyard
- » Runs on two CR123 lithium batteries or one rechargeable 18650 battery
- » Square anti-roll head



Mfr. Model #	Lumens	Length	Run Time	BSE Part #
940-310	130	125 mm	4 H	3187378

## GatorLite 3C eLED® CPO Flashlights

### Underwater Kinetics

Features the latest innovations in 3C hand light design for reliable on the job performance.

- » Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected
- » Ergonomic belt clip allows for more comfortable and secure grip
- » Large push button switch works with heavy gloves
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Thermal recovery system recycles heat from the LED to warm batteries for improved performance in low temperatures
- » Waterproof design for all weather use
- » eLED® CPO-AT (CL 1 Div 1)
- » Alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Includes	Run Time	BSE Part #
22101	125	7.5"	Yellow	W/o batteries	32 H	3078168
22107	125	7.5"	Black	W/o batteries	32 H	3187712
22109	125	7.5"	Yellow	Sleeve instruction, with batteries	32 H	3187706
22110	125	7.5"	Black	Sleeve instruction, with batteries	32 H	3187713

## UK300 Xenon Flashlights

### Underwater Kinetics

Well-respected, dependable work light designed to meet the most rigorous safety requirements.

- » 3.1W high pressure xenon filled lamp
- » Attaches with unbreakable nylon clip, lanyard or stainless steel ring
- » Molded rubber glare reducing bezel cover
- » Non-conductive and corrosion proof due to ABS, polycarbonate and nylon construction
- » Polarized battery holder and hydrogen vent minimize damage from leaky batteries
- » Precision machined aluminum reflector gives bright, narrow beam for sighting distant objects
- » Alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
22016	53	8.7"	Yellow	5 H	2415507

## Nitex Pro eLED® Rechargeable Flashlights

### Underwater Kinetics

The Class 1 Div 2 certified Nitex® eLED® Rechargeable flashlight is the smallest and brightest in its class.

- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Thermal recovery system recycles heat from the LED to warm batteries for improved performance in low temperatures
- » Waterproof design for all weather use



Mfr. Model #	Lumens	Length	Color	Includes	Run Time	BSE Part #
12346	90	4.6"	Yellow	Flashlight	4 H	3187703
12347	90	4.6"	Black	Flashlight	4 H	3187724
12334	90	4.6"	Yellow	Charger, helmet clip, AC power supply	4 H	3187729
12335	90	4.6"	Black	Charger, helmet clip, AC power supply	4 H	3187731
12344	90	4.6"	Yellow	Battery	4 H	3187720
12345	90	4.6"	Black	Battery	4 H	3187723
12348	90	4.6"	Yellow	6 Station kit, helmet clip	4 H	3187704
12350	90	4.6"	Yellow	6 Station kit	4 H	3187705
12351	90	4.6"	Black	6 Station kit	4 H	3187685

## UK4AA Xenon Twist Bezel Flashlights

### Underwater Kinetics

Indestructible design, reliability and extreme brightness at a fraction of the price of other lights in its league.

- » 2.1W high brightness xenon filled lamp
- » Hydrogen scrubber catalyst, polarized battery contacts and 0-psi vent minimize explosive risk from leaking batteries
- » Prefocused high intensity spot beam
- » Rubber sheath molded over bezel to reduce glare and improve impact resistance (passes UL 30' drop to concrete test)
- » Tough, non-corroding ABS and polycarbonate plastic construction
- » Twist ON and OFF switch
- » Twist bezel
- » Alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14189	38	6.2"	Yellow	5 H	3187687



## UK4AA Xenon Front Switch Flashlights

### Underwater Kinetics

Matches high performance with a sleek, compact design that can be operated with gloves.

- » 2.1W high brightness xenon filled lamp
- » Hydrogen scrubber catalyst, polarized battery contacts and 0-psi vent minimize explosive risk from leaking batteries
- » Prefocused high intensity spot beam
- » Push-button thumb switch
- » Rubber sheath molded over bezel to reduce glare and improve impact resistance (passes UL 30' drop to concrete test)
- » Tough, non-corroding ABS and polycarbonate plastic construction
- » Front switch, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14108	38	6.1"	Black	5 H	3187686
14109	38	6.1"	Orange	5 H	3187696
14120	38	6.1"	Yellow	5 H	2401509

## UK4AA eLED® CPO Front Switch Flashlights

### Underwater Kinetics

Matches powerful performance with a sleek, compact design that can be operated with gloves.

- » Attaches to all work helmets using UK accessory clips
- » Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected
- » LED will not break when dropped and its life expectancy is well over 50,000 hours
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Push-button front switch switches light between ON/OFF with continuous or momentary action
- » Thermal recovery system recycles heat from the LED to warm batteries for improved performance in low temperatures
- » Waterproof design for all weather use
- » Front switch, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14439	120	6.7"	Yellow	5 H	3187677
14459	120	6.7"	Black	5 H	3187688

## UK4AA eLED® Zoom Front Switch Flashlights

### Underwater Kinetics

Projection optics allows for zoom with a twist of the bezel from a wide beam to an intense spot.

- » Hydrogen scrubber catalyst, polarized battery contacts and 0-psi vent minimize explosive risk from leaking batteries
- » Mounts on all work helmets with accessory mounting clips
- » Push-button thumb switch switches light between ON/OFF and high/low intensity with continuous or momentary action
- » Rubber sheath molded over bezel to reduce glare and improve impact resistance (passes 6' drop to concrete test)
- » Single high-intensity 2W LED lasts for thousands of hours and will not break when dropped
- » Tough, electrically non-conductive, non-corroding ABS and polycarbonate plastic construction
- » Unique eLED® circuitry maintains constant brightness for 80% of alkaline battery life
- » Front switch, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14502	77	6.7"	Black	5 H	3187709
14506	77	6.7"	Yellow	5 H	2783701

## UK4AA eLED® CPO Tail Switch Flashlights

### Underwater Kinetics

Matches powerful performance with a sleek, compact design that can be operated with gloves.

- » Attaches to all work helmets using UK accessory clips
- » Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected
- » LED will not break when dropped and its life expectancy is well over 50,000 hours
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Push-button tail switch switches light between ON/OFF with continuous or momentary action
- » Thermal recovery system recycles heat from the LED to warm batteries for improved performance in low temperatures
- » Waterproof design for all weather use
- » Tail switch, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14431	120	6.7"	Yellow	5 H	3187690
14457	120	6.7"	Black	5 H	3187695

## UK4AA Right Angle Xenon Flashlights

### Underwater Kinetics

The 90° lamp head rotates in any direction to focus light exactly where it's needed.

- » Hydrogen scrubber catalyst, polarized battery contacts and 0-psi vent minimize explosive risk from leaking batteries
- » New easy loading drop-in battery compartment for quick reload of batteries, alkaline disposable battery
- » Prefocused high intensity xenon lamp, front switch
- » Rubber covered thumb switch allows momentary or continuous duty
- » Rubber sheath molded over bezel to reduce glare and improve impact resistance
- » Split ring and clip included for attachment to coat pocket, belt or strap
- » Tough, non-corroding ABS and polycarbonate plastic construction



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14162	38	6.7"	Black	5 H	3187682
14191	38	6.7"	Yellow	5 H	3187680

## UK3AA eLED® CPO Twist Bezel Flashlights

### Underwater Kinetics

Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected.

- » Can be mounted to any helmet or hard hat using a UK helmet clip
- » Powered by 3AA / LR6 Alkaline cells
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Thermal recovery system transfers heat from LED to warm batteries for better cold weather performance
- » Twist ON and OFF switch
- » Waterproof design for all weather use
- » Twist bezel, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
10019	110	1.6 in	Yellow	8 H	3187692
10020	110	1.6 in	Black	8 H	3187698

## UK4AA Right Angle eLED® Zoom Flashlights

### Underwater Kinetics

Projection optics allows for zoom with a twist of the bezel from a wide beam to an intense spot single high-intensity 2W LED lasts for thousands of hours and will not break when dropped.

- » Hydrogen scrubber catalyst, polarized battery contacts and 0-psi vent minimize explosive risk from leaking batteries
- » Mounts on all work helmets with accessory mounting clips
- » ON/OFF and high/low intensity with continuous or momentary action
- » Push-button thumb switch, front switch, alkaline disposable battery
- » Rubber sheath molded over bezel reduces glare and improves impact resistance (passes 6' drop to concrete test)
- » Tough, electrically non-conductive, non-corroding ABS and polycarbonate plastic construction
- » Unique eLED® circuitry maintains constant brightness for 80% of alkaline battery life



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
14510	77	6.7 in	Black	5 H	3187702
14524	77	6.7 in	Yellow	5 H	3187678

## UK3AA eLED® CPO Front Switch Flashlights

### Underwater Kinetics

Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected.

- » Can be mounted to any helmet or hard hat using a UK helmet clip
- » Powered by 3AA / LR6 Alkaline cells
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Push-button front switch switches light between ON/OFF with continuous or momentary action
- » Thermal recovery system transfers heat from LED to warm batteries for better cold weather performance
- » Waterproof design for all weather use
- » Front switch, alkaline disposable battery



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
10005	110	5.3 in	Yellow	8 H	3187689
10024	110	5.3 in	Black	8 H	3187683

## UK3AA eLED® CPO Tail Switch Flashlights

### Underwater Kinetics

Beam produces a bright spot with almost no peripheral light so nearby personnel are not affected, powered by 3AA / LR6 Alkaline cells.

- » Can be mounted to any helmet or hard hat using a UK helmet clip
- » Proprietary compound path optics (CPO) permits high efficiency and compact size
- » Push-button tail switch switches light between ON/OFF with continuous or momentary action
- » Thermal recovery system transfers heat from LED to warm batteries for better cold weather performance
- » Waterproof design for all weather use
- » Tail switch



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
10001	110	5.3"	Yellow	8 H	3187691
10022	110	5.3"	Black	8 H	3187697

## UK2AAA eLED® Mini Pocket Lights

### Underwater Kinetics

Uniquely powerful, small and sturdy. Clips to almost anything so it is always ready when it's needed.

- » 15 hours of high brightness before fading to a low level glow
- » ABS and polycarbonate plastic construction
- » Built-in current regulation circuit for constant light output and long lamp life
- » Key ring for use as a pocket light
- » Nylon clip included for attaching to safety glasses or the brim of a cap
- » Twist ON and OFF switch
- » Waterproof O-ring seal
- » Lithium/alkaline disposable



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
09102	7	2.9"	Black	Alkaline: 15 H; Lithium: 11 H	3187699
09117	7	2.9"	Yellow	Alkaline: 15 H; Lithium: 11 H	3187693

## UK2AAA eLED® MPL I Flashlights

Used as a pocket light, cap light or for inspection.

### Underwater Kinetics

- » ABS and polycarbonate plastic construction
- » ATEX Certifications pending
- » Built-in current regulation circuit for constant light output and long lamp life
- » ETL Class I, Div 1 certified
- » Key ring for use as a pocket light
- » Nylon clip included for attaching to safety glasses or the brim of a cap
- » Twist ON and OFF switch
- » Waterproof O-ring seal



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
09220	35	3.2"	Black	3 H	3187681
09224	35	3.2"	Yellow	3 H	3187679

## UK2AAA eLED® Pen Lights I

### Underwater Kinetics

Ideal for close-up inspection, but bright and lightweight enough for many other applications.

- » ABS and polycarbonate plastic construction
- » Electrically non-conductive case
- » Molded pocket clip positioned near the head for easy pocket insertion
- » Protective rubber lens cover and glare reducer
- » Rubber covered click ON and OFF or momentary switch
- » Waterproof O-ring seal



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
13330	35	5.2"	Black	3 H	3187718
13334	35	5.2"	Yellow	3 H	3187715

## UK2AAA eLED® Pen Lights S

### Underwater Kinetics

Compact, durable, waterproof and feature a thumb switch and convenient pocket clip.

- » 5 hours of high brightness before fading to a low level glow
- » Electrically non-conductive case
- » Molded pocket clip
- » Protective rubber lens cover and glare reducer
- » Rubber covered click ON and OFF or momentary switch
- » Tough LEXAN® plastic construction
- » Waterproof O-ring seal
- » Lithium/alkaline disposable



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
13301	7	.8"	Yellow	Alkaline: 15 H; Lithium: 11 H	3187710

## UK2AAA Xenon Pen Lights

### Underwater Kinetics

Used for inspecting small, tight spaces.

- » 1.12W high brightness xenon filled lamp
- » Electrically non-conductive case
- » Glow-in-the-dark button tip for easy location in the dark
- » Molded pocket clip
- » Prefocused lamp for instant narrow beam
- » Tough LEXAN® plastic construction
- » Twist ON and OFF switch



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
13007	12	4.8"	Black	2 H	3187737
13051	12	4.8"	Yellow	2 H	3187735

## UK2AAA Xenon Pen Lights S

### Underwater Kinetics

Ideal for close-up inspections, night-time repairs or navigating in the dark.

- » 1.12W high brightness xenon filled lamp; alkaline disposable battery
- » Electrically non-conductive case
- » Molded pocket clip and waterproof O-ring seal
- » Prefocused lamp for instant narrow beam
- » Rubber covered click ON and OFF or momentary switch
- » Tough LEXAN® plastic construction



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
13203	12	5"	Black	2 H	3187732
13206	12	5"	Yellow	2 H	3187730

## Traffic Director Wands

### Underwater Kinetics

Attach the bright orange wand to the 4AA eLED® CPO, 4AA Xenon, Nitex Pro or Super Q eLED® bezel for a traffic directing solution.

- » Lightweight and bright, providing an effective method for emergency signaling in any condition
- » Renders a red filtered beam from an opening at the top, allowing maximum precision when directing traffic



Mfr. Model #	Length	BSE Part #
14877	7.6"	3187739

## 3AA eLED® CPO/4AA eLED Zoom Traffic Director Wands

### Underwater Kinetics

Attach the bright orange wand to any 3AA or the 4AA eLED® Zoom bezel for a traffic directing solution.

- » Wand is also unique in that it renders a red filtered beam from an opening at the top, allowing maximum precision when directing traffic
- » Lightweight and bright, providing an effective method for emergency signaling in any condition



Mfr. Model #	Length	BSE Part #
14884	7.6"	3187722



## Nylon Belt Pouches

Underwater Kinetics



Mfr. Model #	Type	BSE Part #
14816	Fits all UK4AA and UK3AA model flashlights	2477064
14833	Fits UK4AA Xenon, UK4AA eLED CPO, Nitex and Super Q eLED lights	3187721
15803	Fits Nitex Pro/Super Q products	3187725

## Beamguides

Underwater Kinetics

Fiber optic attachment uses beam concentrator technology to channel light from our 2AAA eLED I flashlights into a flexible fiber optic probe for a substantial increase in brightness compared to other similar tools.

- » 4" (10 cm) or 20" (50 cm) flexible fiber optic channels light into hard to reach areas
- » Easily attaches to UK 2AAA eLED PEN I and MPL I flashlights or other 7/8" diameter lights
- » Non-conductive, non-magnetic plastic resin and rubber construction for electrical applications
- » Non-corroding materials allow use in wet environment
- » Projects 5 lumens when attached to flashlight



Mfr. Model #	Description	BSE Part #
13808	Beamguide fiber optic (4 in/100 mm)	3187717
13809	Beamguide fiber optic (20 in/500 mm)	3187716

## Right Angle Head Kits

Underwater Kinetics

- » Also allows light beam to be directed at work area when light is laid down on a nearby work surface
- » Enables hands-free lighting when clipped to clothing with nylon pocket clip or snap clip
- » Fits 4AA Xenon and Zoom lights



Mfr. Model #	BSE Part #
14845	3187726

## Nitex Pro Desktop Charger Docks

Underwater Kinetics



Mfr. Model #	Description	BSE Part #
12846	Single charger dock	3187708
12841	6-Station charger dock	3187719

## 12 VDC Vehicle Plugs

Underwater Kinetics

For Nitex Pro products.



Mfr. Model #	BSE Part #
14837	3187714

## Power Supply for Desktop Chargers

Underwater Kinetics

For drop-in charger dock.



Mfr. Model #	BSE Part #
12812	3187736

## Nitex Pro Lanyards

Underwater Kinetics

Nitex Pro/Super Q/Aqualite.



Mfr. Model #	BSE Part #
12836	3187745

# Portable LIGHTING

## Hardhat Flashlight Side Holders

### Underwater Kinetics

Attach a high intensity UK4AA or 3AA light to any hard hat.

- » Locks in any position for perfect alignment
- » Made from non-conductive glass filled nylon for super strength
- » Adapters included for slotted, vertical sided and brim hard hats
- » Also clamps to ear muffs



Mfr. Model #	Type	BSE Part #
14819	Universal adjustable helmet clip	2231833

## Adjustable Stainless Steel Helmet Clips

### Underwater Kinetics

Perfect for fire helmets and other wide brim safety helmets, this stainless steel clip holds the UK4AA or UK 3AA light at any angle for hands free illumination.

- » Clamps to hat brims up to 3/8" thick
- » Heavy gauge stainless steel construction
- » Large knob allows adjustment to proper angle



Mfr. Model #	BSE Part #
14818	2729154

## Nitex Pro GFN Traditional Helmet Clips

### Underwater Kinetics

The unbreakable nylon helmet clip fits close to the brim to minimize entanglement issues associated with low hanging wires, limited access doorway frames and other confined spaces.

- » The only helmet mounting clip that allows the user to easily remove the light for use as a handheld flashlight, for close-up or inspection work



Mfr. Model #	BSE Part #
12842	3187707

## Rylee Helmet Clips

### Underwater Kinetics

Attaches UK4AA UK3AA light to all American classic style fire helmets.

- » Clamps above or below brim of American style fire helmets
- » Does not interfere with goggles or face shield
- » Heavy gauge stainless steel construction
- » Protective clamping plate prevents damage to rim of helmet



Mfr. Model #	BSE Part #
14851	3187738

## Mini Light Clips

### Underwater Kinetics

Uniquely powerful, small and sturdy. Weighing only 1.3 oz., the MPL clips to almost anything so it is always ready when light is needed.

- » Comes with a key ring and clip for easy attachment to a hat, clothing or belt for hands-free lighting
- » Perfect for close-up work or inspection and its xenon lamp enhances color clarity
- » Brightest 2AAA light in its class



Mfr. Model #	Lumens	Length	Color	Run Time	BSE Part #
09064	12	2.9"	Yellow	2 H	3082141
09007	12	2.9"	Black	2 H	3187711

## Nylon Pocket Clips

### Underwater Kinetics

Pack of ten.



Mfr. Model #	BSE Part #
14843	3187734

## Industrial® LED Rubber Lights

### Energizer

Sturdy construction helps the light survive a 1-meter drop. Features a non-slip textured rubber handle and a pushbutton switch that's easy to operate. It's ready for when it's needed. Just flip down built in stand.

- » Non-roll design, built in stand
- » LEDs never need replacing
- » Pushbutton switch large enough to use while wearing gloves
- » Textured handle for non-slip grip
- » Batteries included



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
INRUB21EH	12	White LED	2 AA	16 H	2695893
INRUB22EH	11	White LED	2 AAA	16 H	3195972

## 2 LED Project Lights

### Energizer

Ideal for wet areas, this heavy duty flashlight is weatherproof and shockproof.

- » A built-in hanger ring makes it easy to keep this sturdy light within reach
- » An impact-resistant housing reduces the chance of breakage from dropping and abuse and the chemical-resistant polypropylene body protects it from staining and corrosion
- » IPX4



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
1251L	35	White LED	2 "D" (not included)	113 H	3018805

## Industrial® Heavy Duty Flashlights

### Energizer

- » Intense beam shines usable light on objects up to 31 meters away using Energizer® MAX® batteries
- » Provides usable light for 3 3/4 hours using Energizer® MAX® batteries
- » Survives a 1 meter drop



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
1151L	11	Krypton	2 AA	43 H	3018803

## LED Handheld Lights

### Energizer

Approved by global safety agencies, this handheld LED is ideal for work in harsh conditions.

- » Survives 2 MR Drop (Waterproof - Meets IEC 60529 IPX7 Standards 1 meter for 30 Min)



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
MS2DLED	28	One high power LED	2D	68 H	2612261

## 2D Magnet Lights

### Energizer

The light has a sturdy polyethylene case and a shatterproof lens to protect interior components from damage on the job.

- » Anti-roll feature helps keep the light in place when it's set down
- » Flip-up hook allows hanging or belt-carrying the light easily
- » A magnet on the slide switch allowing to fix it to a toolbox or any other metal surfaces



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
E251Y	17	KPR-102 Krypton Beam	2D	15 H	832271

## Industrial® 2D Economy Lights

### Energizer

A great choice for general lighting needs, features a flip-up hook that allows hanging or belt-carrying the light easily.

- » Flip-up hanger ring
- » Resists breaking from dropping or abuse



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
E250Y	17	KPR-102 Krypton Beam	2D	2 H 30 M	1049092

## 2 AA Long Life LED Flashlights

### Energizer

- » An attached wrist lanyard and easy to use slide switch provide added convenience
- » Runs 40 hours on 2 AA size carbon zinc batteries and the lifetime LED never needs replacing



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
EVWL21S	10	LED	2 AA	40 H	3195978

## LED Economy Flashlights

### Energizer

- » The ribbed casing provides both strength and a non-slip grip and the contoured slide switch is easy to use
- » Uses only 1 D-cell battery and lasts 8 times longer than similar lights with incandescent bulbs



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
3151LS	9	LED	1 "D" cell (included)	8 H	3195977

## LED Flashlights

### Energizer

- » Compact size fits easily in drawer or toolbox
- » Easy to use slide switch
- » Non-roll design



### Energizer

Mfr. Model #	Lumens	Bulb	Battery Type	Run Time	BSE Part #
EVWL25S	26	LED	2D	86 H	3195966

### Do you need any of these items?

- » Hand tools
- » Power tools
- » Safety
- » Security
- » Chemicals
- » Lubricants and paints

Check out [borderstates.com](http://borderstates.com) for a list of all the products we carry.

NOTES



Portable  
**LIGHTING**

# HEADLAMPS

HEADLAMPS DIVIDER



## In this section

Headlamps..... **46**

## Trident® Headlamps

### Streamlight

- » Includes 3 AAA batteries, 90° tilting head
- » Part number 61025 is HAZ-LO



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61050	9	Yellow	White	150 H	1720933
61051	24	Green	(2) White, (1) Green	150 H (Single LED)	1927945
61025	85	Yellow	White	24H	3218379

## Septor® Headlamps

### Streamlight

- » Includes 3 AAA batteries, 90° tilting head
- » Part number 61024 is HAZ-LO



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61052	7 LEDs: 120; 3 LEDs: 45; 1 LED: 13	Yellow	White	7 LEDs: 3 H 30 M; 3 LEDs: 10 H; 1 LED: 55 H	1720932
61024	High: 85; Low: 20	Yellow	White	High: 8 H; Low 50H	3218380

## Argo® LED Headlamps

### Streamlight

Ultra-compact, extremely light weight, high-performance LED headlight.

- » Includes 3 AAA batteries, 90° tilting head
- » Part number 61026 is HAZ-LO



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61301	High: 150; Med: 100; Low: 45	Black	White	High: 3 H; Med: 4 H 30 M; Low: 30 H	1927887
61026	High: 90; Low: 20	Yellow	White	High: 8 H; Low: 50 H	3218378

## Double Clutch™ USB Headlamps

### Streamlight

- » PX4; water-resistant; 2 meter impact resistance tested
- » Spot and flood beam patterns; high or low lighting modes with previous mode memory; 60° tilting head
- » Includes USB cord, and adjustable elastic and hard hat straps



Mfr. Model #	Lumens	Color	Run Time	Type	BSE Part #
61600	High: 125; Low: 30	Yellow	High: 3 H 30 M; Low 10 H	USB	3218381
61601	High: 125; Low: 30	Black	High: 3 H 30 M; Low 10 H	USB	3218382
61602	High: 125; Low: 30	Yellow	High: 6 H; Low 18 H	120V AC	3218383
61603	High: 125; Low: 30	Black	High: 6 H; Low 18 H	120V AC	3218384

## Enduro® LED Headlamps

### Streamlight

- » Solid State Power Regulation provides maximum light output throughout battery life
- » Unbreakable polycarbonate lens; high-flux LED, reflector focused for 100'+ range; integral hatclip attaches to brim of cap
- » Packaged with batteries and rubber/elastic headstrap



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61400	High: 14.5; Low: 6	Black	White	High: 6 H; Low: 12 H	1927867

## HAZ-LO Division 1 Headlamps

### Streamlight

Impact resistant engineering resin case offering exceptional durability and weather resistance. All openings are O-ring sealed.

- » Parabolic reflector produces long range brilliance and smooth uniform beam pattern
- » Rubber hard hat strap and elastic strap
- » 90° tilting head; Unbreakable polycarbonate lens
- » Push button switch; easy operation even when wearing heavy gloves



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61200	120	Yellow	C4® LED	11 H	2496857

## Performance Tasker LED Head/Helmet Lights

### FoxFury

Used in maintenance, inspection and repair applications.

- » Optimized blend of focused, distance and panoramic light
- » Waterproof to 20'
- » Quick tilt (45°)
- » Polycarbonate lens and housing



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
400-009S	64	AA (4)	8 H	2745497

## Performance Outdoor / Work Headlamps

### FoxFury

This durable headlamp is waterproof, comes with an elastic strap and runs on four AA batteries.



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
400-003	62	4x AA batteries	8 H	3187393

## Performance Intrinsic Tasker LED Helmet Lights

### FoxFury

This waterproof and fire resistant headlamp features an adjustable tilt to aim light where needed.



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
400-FF417-2	54	4x AA batteries	6 H	3187384
400-FF417-5	50	4x AA batteries	6 H	3187387

## Compact Wide Angle Headlamp and Helmet Lights with Rear Safety LED

### FoxFury

This waterproof and fire resistant headlamp features an adjustable tilt to aim light where needed.



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
410-009S	48	4x AA batteries	24 H	2866628
420-009S	72	4x AA batteries	12 H	3187373

## Signature Intrinsic Tasker-Fire Headlamps

### FoxFury

- » It also has an adjustable tilt to aim light where needed
- » It comes with a silicone strap, runs on four AA batteries and fits fire helmets without faceshield
- » This wide angle headlamp features white and green LEDs, which increase visibility in smoke and provide immediate situation awareness



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
200-FF261-5	42	4x AA batteries	8 H	3187371

## Signature Intrinsic Tasker Helmet Lights

### FoxFury

- » Silicone strap is for use with safety helmets including firefighter helmets and hard hats
- » The included helmet hold down helps secure the strap to hard hats
- » This waterproof and fire resistant headlamp features an adjustable tilt to aim light where needed



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
200-FF261-2	38.2	4x AA batteries	8 H	3187396

## Compact Wide Angle LED Headlamps with Adjustable Tilt

### FoxFury

- » A red rear safety LED allows it to be seen on scene
- » Powerful white LED headlamp and helmet light provides up to 120 lumens of focused and panoramic light
- » This waterproof and fire resistant headlamp features an adjustable tilt to aim light where needed



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
480-009S	120	4x AA batteries	4 H 30 M	3140812

# Portable LIGHTING

## LED Head Beams

### Energizer

High-tech LED headlight for hands-free performance.

- » 3 bright LED bulbs: 2 white for super bright light, 1 red for night vision
- » 3-position slide switch; ABS plastic housing
- » Includes swivels, adjustable headband and 3 AAA batteries
- » Lifetime guarantee
- » Pivoting directional light
- » Shatterproof lens



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
HD33A1EN	28	3 AAA	50 H	1793031

## Pro 4 Industrial LED Headlights

### Energizer

- » Hands free for everything from HVAC to automotive work
- » The soft elastic headband and curved design make for a comfortable fit
- » Two light modes allow the best illumination for the task at hand
- » Water resistant, making it suitable for outdoor tasks



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
HD4L33INH	28	AAA	21 H	3195973

## Brilliant Beam® Industrial® 5 LED Headlights

### Energizer

- » It puts light where it's facing and has a swivel adjustment with ratchet positioning for accurate aim
- » Perfect for any job that requires both hands
- » This light can be worn comfortably around the head for long periods of time
- » Variable light sources allow the best illumination for the job – flood, spot or green – without changing lights



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
INHD5L32H	70	AAA	6 H	3195976

## Industrial 6 LED Headlights

### Energizer

Lightweight, versatile and comfortable industrial headlight designed for working on electrical, plumbing, HVAC and other work that requires both hands.

- » Variable light sources: spotlight, floodlight or red LEDs
- » Securely mounts to hardhats or around the head
- » Comfortable for long periods of time



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
HDL33AINE	95	3 AAA	8 H 30 M	2064302

## Industrial Pro 7 Headlights

### Energizer

The four light modes allows for the best illumination for the task at hand. In addition, this light is water resistant, making it suitable for outdoor use. Meets IEC 60529 IPX4 standards.

- » 4 light modes – area, spot, flood and red for night vision
- » Continues to operate after exposure to splashing water from all directions
- » Lifetime LEDs never need replacing
- » Pivots to direct light where it's needed
- » Usable light for 14 hours and 15 minutes in flood mode between battery changes (with Energizer® MAX® batteries)



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
HD7L33INH	58	3 x AAA	5 H 30 M	3195974

## 3AAA eLED® Vizion™ Headlamps

### Underwater Kinetics

- » 3 selectable beam patterns - spot, diffuse and red diffuse
- » Advanced Compound Path Optics (CPO) focus the beam and are contained internally so that there are no lens parts to lose
- » High and low power settings
- » Large push button control switch works with heavy gloves
- » Waterproof design for all weather use



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
17001	High: 65; Low: 35	AAA Lithium/Alkaline Disposable	High: 13 H; Low: 17 H	3187746



### 3AAA eLED® Vizion™ I Headlamps

#### Underwater Kinetics

- » Power source: AAA alkaline batteries
- » Bands are CL 1 Div 1; 3" x 1.5" x 1.8"



Mfr. Model #	Lumens	Color	Includes	Run Time	BSE Part #
17006	High 65; Low 35	Black	Rubber band	H: 13 H; L: 17 H	3187684
17007	High 65; Low 35	Yellow	Rubber band	H: 13 H; L: 17 H	2783700
17018	High 65; Low 35	Black	Woven black band	H: 13 H; L: 17 H	3187700
17019	High 65; Low 35	Yellow	Woven black band	H: 13 H; L: 17 H	3187694

### Vantage® LED Helmet Mounted Flashlights

#### Streamlight

- » IPX7 rated design; waterproof to 1 meter for 30 minutes
- » Swivel clamp and insertable 5° angle adjuster to optimize beam location
- » Ultra-bright blue LED safety tail light visible in heavy smoke
- » Reflective strip
- » Serialized for positive identification
- » Battery type: two 3V CR123A lithium batteries



Mfr. Model #	Lumens	Color	Run Time	BSE Part #
69140	115	Black	6 H	2680580
69157	115	Red	6 H	3187606

### ClipMate® USB Rechargeable Clip-On Lights

#### Streamlight

- » Dual LEDs: white C4® LED, 620-639nm red LED



Mfr. Model #	Lumens	Color	LED	Includes	BSE Part #
61125	10	Black	White and red	Light	3218388
61126	10	Black	White and red	120V AC	3218389

### ClipMate® Lights

#### Streamlight

A small, but durable, clip-on flashlight that gives the power of three super bright, 100,000-hour LEDs.

- » Power source: AAA alkaline batteries
- » 3.52" L x 0.85" W



Mfr. Model #	Lumens	Color	LED	Run Time	BSE Part #
61100	27	Yellow	White	40 H	1723184
61101	27	Black	White	40 H	1723185
61102	12	Black	Green	40 H	1927865
61115	12	Camo	Green	40 H	3187520

### SideSlide C-Clamp Side Mounted Helmet Lights

#### FoxFury

- » Features a green rear safety LED that allows it to be seen on scene
- » Fits many fire helmets and wide brim hard hats; features the unique SideSlide lock that holds the flashlight securely in the helmet adaptor
- » Flashlight with innovative C-Clamp helmet adaptor, which allows the light to transition from a flashlight into a side mounted hard hat or firefighter helmet light in seconds
- » Light runs on either 2 CR123 batteries or one rechargeable 18650 battery



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
940K-010FI	200	2x CR123 batteries	8 H	3187370

### SideSlide Bolt Side Mounted Helmet Lights

#### FoxFury

- » Fits select rescue helmets and features the unique SideSlide lock that holds the flashlight securely in the helmet adaptor
- » Light runs on either 2 CR123 batteries or one rechargeable 18650 battery



Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
940K-010RSC	200	2x CR123 batteries	8 H	3187375

## Industrial™ 360° Cap Lights

### Energizer

Its clip attaches securely to both caps and helmets and the unique swivel base allows 360° rotation.

- » 3 light modes, high and low white for general lighting and red for preserving night vision
- » Clip attaches to both caps and helmets
- » Light swivels 360° for pinpoint positioning
- » Stands up to rough weather
- » The light still operates after exposure to splashing water from any direction



### Energizer

Mfr. Model #	Lumens	Battery Type	Run Time	BSE Part #
INCAP11EH	High 40; Low: 13	1 x AA	High: 4 H; Low: 22 H; Red: 41 H	3195975

## Helmet Lighting Kits

### Streamlight



Mfr. Model #	Description	BSE Part #
68270	3AA ProPolymer HAZ-LO Helmet Lighting Kit, includes alkaline batteries, helmet mount and rubber helmet strap	2465590
88854	PolyTac® Tactical Lighting Kit, includes two CR123A lithium batteries, helmet mount and rubber helmet strap	3187539

## Breakthrough Door Wedges

### FoxFury

Removable BT black wedges do one thing really well - keep doors open. Use them on the floor as a traditional door stop or wedge it into the door hinge.

- » A single BT wedge fits in current model BT right angle lights
- » Each package comes as a 3 pack
- » Scalloped edges for easy gripping
- » Size: 3.0" L x 2.0" W x 2.0" D
- » Total weight of 4.2 oz



Mfr. Model #	Color	BSE Part #
700-WDG-BL	Black	3204028
700-WDG-YE	Yellow	3204029

## Elastic Headlamp Straps

### FoxFury

Replacement headstrap for any FoxFury headlamp.

- » Not recommended for use in firefighting and other high temperature applications



Mfr. Model #	Description	BSE Part #
60-019	Elastic headlamp strap	3204026

## 3D Fury Glow Straps

### FoxFury

Glow in the dark silicone strap for use with safety helmets including hard hats and firefighter helmets.

- » Fire resistant and can be used in firefighting and other high temperature applications
- » For use with FoxFury headlamps: Command Series, Discover Series, Performance Series, PRO Series and Signature Series
- » Meets NFPA 1971-2007 Fire Resistant Requirements: 500F / 260C for 30 minutes



Mfr. Model #	Description	BSE Part #
600-026	Silicone glow strap	3204025

## Vizion Bands

### Underwater Kinetics

- » Jacquard pattern woven into the band
- » Made from adsorbent plush woven nylon and non-allergenic elastic which is soft to the skin



Mfr. Model #	Description	BSE Part #
17501	Tribal black band	3187733

## Rubber Vizion Bands

### Underwater Kinetics

For helmet mounted applications, uses an all rubber elastic band, which conforms to the dome shape of a helmet for a better non-slip grip to the surface.



Mfr. Model #	Description	BSE Part #
17503	Rubber elastic band	3142502

Portable  
**LIGHTING**

# BATTERIES



## In this section

Batteries ..... **52**

## Procell® Alkaline Batteries

**Duracell**

Manufactured to rigid specifications to meet some of the highest standards of durability and longevity that professional users demand and expect.



**DURACELL**

Mfr. Model #	Battery Size	BSE Part #
PC2400	AAA	1573045
PC1500	AA	1944694
PC1400	C	1944693
PC1300	D	1935321
PC915	6V	2245132
PC1604	9V	1944695
PC903	Lantern	2926691

## Industrial Alkaline Batteries

**Energizer**

For heavy current or continuous use applications.

- » Operate well in temperature extremes (0 - 130°F)
- » No mercury added, special disposal not required
- » Excellent shelf life, ready for use even after 5 years of storage



**Energizer**

Mfr. Model #	Battery Size	Package Quantity	BSE Part #
EN92	AAA	24	107508
EN91	AA	24	107506
EN93	C	12	107514
EN95	D	12	107525
EN22	9V	12	107502
EN529	Lantern	6	677608

## Alkaline Batteries

**Rayovac**

Guaranteed to stay fresh up to 10 years.



**RAYOVAC**

Mfr. Model #	Battery Size	Package Quantity	BSE Part #
AL-AAA	AAA	8	100062
AL-AA	AA	8	100044
AL-C	C	6	100037
AL-D	D	6	100041
AL-9V	9V	6	100054

## Quantum Alkaline Batteries

**Duracell**

Uses a proprietary compression process and unique formulation of ingredients to pack more advanced power into the same size battery.

- » Guaranteed for 10 years in storage
- » Only battery with PowerCheck™
- » Instantly check the power level at any time



**DURACELL**

Mfr. Model #	Battery Size	BSE Part #
QU1500	AA	3077435
QU2400	AAA	3077438
QU1400	C	3180621
QU1300	D	3180620
QU1604BKD	9V	3180626

## Rechargeable NiMH Batteries

**Duracell**

- » 1.2V
- » 20 milliohms at 1 kHz



**DURACELL**

Mfr. Model #	Battery Size	Package Quantity	BSE Part #
DC1500B2N	AA	2	2926656
DC2400B2N	AAA	2	2926657



Portable  
**LIGHTING**

# Emergency **LIGHTING**



## In this section

Flares.....	<b>54</b>
Glow sticks.....	<b>55</b>
Exit signs.....	<b>56</b>



## FLARES

### Classic LED Road Flares

**Aervoe Industries**

The battery operated LED Road Flare is an extremely durable, 18-LED flare that is a safe alternative to incendiary flares.

- » 7 flash patterns
- » Crushproof
- » Magnet to attach to any magnetic surface
- » Requires 2 AA replaceable batteries (included)
- » Visible up to 7 miles
- » Waterproof up to 50' and will float



Mfr. Model #	LED	BSE Part #
1146	Red	3024254
1145	Yellow	3180878

### Universal LED Road Flare 6 Pack Kits

**Aervoe Industries**

The single row of LEDs are visible from a 1/2 to 1 mile distance.

- » 18 LEDs and 7 flash patterns
- » Rechargeable version of the Classic Road Flare
- » Includes a 12V vehicle charger and 120V wall charger



Mfr. Model #	LED	BSE Part #
1163	Blue	2787878
1162	Yellow	3205348

### Super LED Road Flares

**Aervoe Industries**

24 LEDs and two rows of lights to increase visibility up to 2 miles.

- » 7 flashing patterns including SOS rescue (Morse code)
- » Intrinsically safe design with a rubber-tight seal; made of durable materials, crush proof, corrosion proof
- » Powerful magnet to attach to metal surfaces; waterproof and submersible to 50'
- » Single pack includes a storage bag, 120V wall charger, 12V vehicle charger and USB charger for each flare
- » Four pack kit includes four rechargeable road flares in a storage case, 120V wall charger, 12V vehicle charger and two flex-fit tripods



Mfr. Model #	Description	Color	LED	BSE Part #
1164	Single pack	Yellow	Amber	2775361
1165	Single pack	Red	Red	2775366
1166	Four pack recharging case	Red	Red	2775358
1167	Four pack recharging case	Yellow	Amber	2775359

### LED Flare Kits

**Checkers Industrial Safety Products**

Used by law enforcement, fire departments, construction workers, search and rescue teams, tow truckers, ground safety crews and many more who feel they require additional visible warning lights.

- » Battery cycle: 6-8 hours of continuous use, fully charged in 120 min.
- » Has no switches or moving parts to break or become damaged
- » LED brightness: 10 LEDs rated at 15,000 mcads per LED
- » Made of durable aluminum alloy, was made with longevity in mind
- » The lithium battery lasts for hours between charges. Will run on 110-240V and can be customized for the different electrical outlet plugs for any particular country
- » Weatherproof and waterproof up to 15'
- » Flare kit includes 6 LED flares, wall charger and car charger




Mfr. Model #	Description	LED	BSE Part #
FLAREKIT-A	Flare kit	Amber	3205260
FLAREKIT-R	Flare kit	Red	3205261
FLAREKIT-B	Flare kit	Blue	3205262
LEDFLARE-A	Replacement flare	Amber	3205264
LEDFLARE-R	Replacement flare	Red	3205265
LEDFLARE-B	Replacement flare	Blue	3205263

## Pulsar Individual Rechargeable LED Warning Lights

ProBuilt Professional Lighting

Single unit light.



.043	LED	BSE Part #
511407	Blue	3187770
511408	Green	3187769
511409	Red	3187771

## Pulsar 6 Pack Sets

ProBuilt Professional Lighting

Multi-mode, rechargeable LED warning lights.

- » Both sets and individual Pulsars supplied with 12V car charger and 110V wall charger
- » 9 light modes
- » Lithium-ion battery
- » Can withstand most vehicle weights (shock resistant)
- » Waterproof (up to 10 meters)–floats until weighted down



Mfr. Model #	LED	BSE Part #
511401	Miscellaneous	3187765
511402	Amber	3187772
511403	Blue	3187774
511404	Green	3187773
511405	Red	3187775
511410	Infrared	3187767

NOTES

## Baton Traffic LED Flares

Aervoe Industries

A multi-functional flare that can be a road flare or a safety wand.

- » 15 amber LEDs visible light range up to 4 miles (effectively see light patterns up to 1 mile)
- » 5 flash patterns including S.O.S. Morse Code
- » Crush and corrosion proof
- » High strength magnets attach to metal surfaces
- » Includes 120V wall charger, 12V car charger and USB charger
- » Rechargeable battery included, does not need to be replaced
- » Waterproof to 50'



Mfr. Model #	Description	LED	Quantity	BSE Part #
1154	Flare	Amber	1	3141788
1155	Flare	Red	1	3205345
1157	Flare	Amber	3	3205346
1156X	Flare kit	Blue	3	3205373

## Glow STICKS

### Emergency Glow™ Lightsticks

OmniGlow

- » Non-toxic
- » Non-flammable
- » Weatherproof
- » Lanyard included
- » Provides 360° of light



Mfr. Model #	Color	Size	Quantity	Illumination	BSE Part #
9-080802	Blue	6"	1	8 Hours	3187475
9-080988	White	6"	1	8 Hours	3187473
9-08003	Blue	6"	10	8 Hours	3187466
9-08006	White	6"	10	8 Hours	3187471
9-080761	Green	6"	1	12 Hours	3159549
9-080783	Red	6"	1	12 Hours	3187476
9-080826	Yellow	6"	1	12 Hours	3187464
9-080847	Orange	6"	1	12 Hours	3187465
9-08001	Green	6"	10	12 Hours	3187467
9-08002	Red	6"	10	12 Hours	3187468
9-08004	Yellow	6"	10	12 Hours	3187469
9-08005	Orange	6"	10	12 Hours	3187470

EMERGENCY LIGHTING

## Emergency Glow™ Glow Flare™ High-Intensity Lightsticks with Stand

### OmniGlow

- » Non-toxic
- » Non-flammable
- » Weatherproof
- » Includes metal bi-pod
- » Provides 360° of light




Mfr. Model #	Color	Size	Quantity	Illumination	BSE Part #
9-270381	Green	12"	1	30 Minutes	3187474
9-270377	Orange	12"	1	30 Minutes	3187472
9-27036	Green	12"	12	30 Minutes	3187463
9-27035	Orange	12"	12	30 Minutes	3187462

## Emergency Glow™ Lightsticks with Stand

### OmniGlow

- » Non-toxic
- » Non-flammable
- » Weatherproof
- » Includes metal bi-pod
- » Provides 360° of light



Mfr. Model #	Color	Size	Quantity	Illumination	BSE Part #
9-2704902	Green	12"	1	2 Hours	3187479
9-2692802	Blue	12"	1	2 Hours	3187483
9-2704702	Red	12"	1	2 Hours	3187485
9-2704602	Yellow	12"	1	2 Hours	3187477
9-2702902	Orange	12"	1	2 Hours	3187478
9-2600602	White	12"	1	2 Hours	3187480
9-26928	Blue	12"	1	12 Hours	3187486
9-26006	White	12"	1	12 Hours	3187484
9-27049	Green	12"	1	12 Hours	3085396
9-27047	Red	12"	1	12 Hours	3187487
9-27046	Yellow	12"	1	12 Hours	3187481
9-27029	Orange	12"	1	12 Hours	3187482

## Exit SIGNS

### BradyGlo™ Exit Signs

#### Brady

Made from BradyGlo™ plastic material.

- » 50' visibility, 100% reliable and virtually maintenance free
- » Compliant to NFPA life safety code 101 and 2012 IBC regulation and current building codes
- » IBC/IFC, NYC compliant BradyGlo™ performance photoluminescent exit sign
- » 15 1/4" x 8 1/4" in size



Mfr. Model #	Description	Color	BSE Part #
37851	Framed single face wall mount sign	Black	1694670
90885	Framed single face wall mount sign	Red	1687716
80753	Framed single face wall mount sign	White	1695558
112653B	Framed single face wall mount sign	Silver	2452230
38097	Framed single face sign with bracket	Black	1694282
90839	Framed single face sign with bracket	Red	1687786
80754B	Framed single face sign with bracket	White	1695554
112654B	Framed single face sign with bracket	Silver	2452229
38098	Framed double face sign with bracket	Black	1694260
90840	Framed double face sign with bracket	Red	1687785
80755	Framed double face sign with bracket	White	1695552
112655B	Framed double face sign with bracket	Silver	2452228

### BradyGlo™ Semi-Framed 50' Exit Signs

#### Brady

Made from BradyGlo™ plastic material.

- » High performance "glow-in-the-dark" exit signs are energy efficient and easy to install
- » Visible from a distance of 50' in total blackout or heavy smoke conditions
- » 15 3/4" x 10.85" in size



Mfr. Model #	Description	Color	BSE Part #
115197	T-bar ceiling mount / single-sided	Red	2488757
115199	T-bar ceiling mount / double-sided	Red	2488759





### Perimeter LED Exit Signs

Brady

- » Steel housing
- » 12 1/4" x 7 1/2" in size



Mfr. Model #	Color	BSE Part #
56905	Red on black	1689483
56907	Red on white	1689760
56908	Green on white	1689758

### Frameless BradyGlo™ Exit Signs

Brady

Made from BradyGlo™ plastic material.

- » Steel housing
- » 15" x 8 1/2" in size



Mfr. Model #	Color	BSE Part #
87807	Red	1691097
87808	Green	1691093

### BradyGlo™ High Performance Photoluminescent EXIT Kick Plate Signs

Brady

Made from BradyGlo™ plastic material.

- » Ability to earn LEED points with energy efficient product
- » Compliant with all current building codes (2009 IBC, NFPA 101)
- » Non-radioactive, non-electrical, conserve energy and require no wiring or batteries
- » Requires virtually no maintenance
- » Visible in total blackout or heavy smoke conditions
- » 34" x 10" in size



Mfr. Model #	Color	BSE Part #
113063B	Silver	2453512

**We have a variety of facility identification products.**

Talk to your Border States Account Manager today.

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

NOTES

# Specialty **PRODUCTS**

Portable  
**LIGHTING**

## In this section

Specialty products ..... **59**





**LitFinger™ Illuminated Disconnect Hooks**

**Underwater Kinetics**

Fuse barrel replacement is easier and safer because the LitFinger™ features bright light that illuminates the task.

- » Water-resistant battery compartment with sealed silicone rubber push-button
- » Universal splined slotted connector attaches to hotsticks; pointed head for breaking off of ice or debris
- » Sealed borosilicate window to resist heat and flash
- » Bright, unbreakable 1W LED light
- » Hi-low switch for increased battery life
- » Curved arm for hanging
- » 5.7" x 4.9" x 0.9" in size



Mfr. Model #	Lumens	Battery Size	Battery Type	BSE Part #
16001	H: 32; L: 12	3 AAA	Lithium / alkaline disposable	1723164

**LitLink™ Hotstick Accessory Lights**

**Underwater Kinetics**

Provides illumination when using hotstick accessories such as disconnect hooks, tie heads and hacksaws, etc.

- » Water-resistant battery compartment with sealed silicone rubber push-button
- » Sealed borosilicate window to resist heat and flash
- » Bright, unbreakable 1W LED light
- » Hi-low switch for increased battery life
- » 6.2" x 2.3" x 0.9" in size



Mfr. Model #	Lumens	Battery Size	Battery Type	BSE Part #
16002	H: 95; L: 40	3 AAA	Lithium / alkaline disposable	2472417

**Illuminated Fish Rod Tips**

**Klein Tools**

Attach tip to fish rod for ease of visibility in dark spaces.

- » Tapered end for easy pushing and pulling
- » Threaded top for hook or bullet nose attachment
- » Works with most competitors fish sticks



Mfr. Model #	Size	Weight	BSE Part #
56119	2.5" x 37/64"	0.31 lb	2896663

**Multi-Function Compact Power Chargers**

**Checkers Industrial Safety Products**

Small enough to fit in any pocket, yet it is strong enough to start V-8 trucks, cars, ATVs, motorcycles and boats. It can also be used to charge cell phones, laptops or other electronics (multiple devices can be charged at once).

- » 3 hour charge time
- » Includes an on-board LED flashlight, rechargeable lithium ion battery, multi-function adapters and wall/car chargers all in a convenient carrying case
- » USB port 5V, 2A
- » 6.125" x 3" x 1.125" in size



Mfr. Model #	Operating Temperature	Output	Capacity	BSE Part #
JP-9S	-40° F to 185° F (-40° C to 85° C)	Car Boot Port - 19V	13,600 mAh	3205231

NOTES

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

SPECIALTY PRODUCTS

Portable  
**LIGHTING**

# INDEX

## In this section

Abbreviations index.....	<b>61</b>
Index by manufacturer number....	<b>61</b>





Now you know

# ABBREVIATIONS

% percent  
° degree  
Ω Ohm  
μ micrometer or micron  
∅ phase  
# number  
' foot (see also ft)  
" inch (see also in)  
**A** amp  
**AAC** all aluminum conductor  
**AC** alternating current  
**ADA** Americans with Disabilities Act  
**AGS** armor grip suspension  
**Ah** ampere-hour  
**Al** aluminum  
**ANSI** American National Standards Institute  
**ATPV** arc thermal performance value  
**avg** average  
**AWG** American wire gauge  
**C** Celsius  
**cal/cm²** calories of heat energy per square centimeter  
**CCT** correlated color temperature  
**cm** centimeter  
**CM** circular milli-inch  
**CO2** carbon dioxide  
**CRI** color rendering index  
**CSA** Canadian Standards Association  
**cu** cubic  
**Cu** copper  
**cu ft** cubic foot  
**cu yd** cubic yard  
**CUL** Underwriters' Laboratories of Canada  
**d** depth  
**dB** decibel  
**DC** direct current  
**dia** diameter  
**doz** dozen  
**EHS** extra high strength  
**EMT** electrical metallic tubing  
**EPA** Environmental Protection Agency  
**EXT** external

**F** Fahrenheit  
**FDA** Food and Drug Administration  
**fl oz** fluid ounce, fluid ounces  
**fps** frames per second  
**FR** flame-resistant  
**ft** foot (also see ' )  
**g** gram  
**ga** gauge  
**gal** gallon  
**gr** grain  
**gro** gross  
**h** height  
**Hp** horsepower  
**hr** hour  
**HRC** Hazard Risk Category  
**Hz** Hertz  
**I.D.** inside diameter  
**I/O** input/output port  
**ID** identification  
**in** inch (see also " )  
**in lb** pounds per square inch  
**INT** internal  
**K** Kelvin  
**kcmil** thousand circular mil  
**kg** kilogram  
**kHz** kilohertz  
**kV** kilovolt  
**kVA** kilovolt amp  
**kW** kilowatt  
**l** length  
**L** large or liter  
**lb** pound  
**lbf** pounds of force  
**LED** light emitting diode  
**lpw** lumens per watt  
**m** meter  
**M** medium  
**mA** milliamp  
**max** maximum  
**MCM** metal composite material  
**mil** milli-inch  
**min** minute or minimum  
**mL** milliliter  
**mm** millimeter  
**mV** millivolt  
**NEC** National Electrical Code

**NEMA** National Electrical Manufacturers Association  
**NFPA** National Fire Protection Agency  
**NiCd** nickel-cadmium  
**NiMH** nickel-metal hydride  
**nm** nanometer  
**O.D.** outside diameter  
**OSHA** Occupational Safety and Health Administration  
**oz** ounce  
**psi** pounds per square inch  
**PTFE** polytetrafluoroethylene  
**PU** polyurethane  
**PVC** polyvinyl chloride  
**qt** quart  
**RoHS** Restriction of Hazardous Substances Directive  
**S** small  
**sec** second  
**sol** solid  
**SPM** strokes per minute  
**sq** square  
**std** standard  
**str** stranded  
**T** ton  
**THHN** thermoplastic high heat-resistant nylon  
**TPI** threads per inch  
**TPR** thermoplastic rubber  
**UL** Underwriters' Laboratories  
**USDA** United States Department of Agriculture  
**UV** ultraviolet  
**V** volt  
**V AC** volts alternating current  
**V DC** volts direct current  
**VA** volt-ampere  
**w** width  
**W** watt, wattage  
**XL** extra large  
**yd** yard

It's easy to find

# PRODUCTS

<b>Aerove</b>	PC1500.....52	<b>Hubbell Lighting</b>
1145.....54	PC1604.....52	DOK12LU6KFLC6.....16
1146.....54	PC2400.....52	DOK12LU6KSPC6.....16
1154.....55	PC903.....52	DOK18LU6KFL350.....16
1155.....55	PC915.....52	DOK18LU6KSP350.....16
1157.....55	QU1300.....52	DOK6LU6KFL700.....16
1162.....54	QU1400.....52	DOK6LU6KSP700.....16
1163.....54	QU1500.....52	<b>Klein Tools</b>
1164.....54	QU1604BKD.....52	56119.....59
1165.....54	QU2400.....52	<b>Lithonia Lighting</b>
1166.....54	<b>Energizer</b>	1290L.....10
1167.....54	1151L.....43	1292L.....10
1156X.....55	1251L.....43	LRDOC12MEDYEL
<b>Bayco</b>	3151LS.....44	120M4.....16
BA1002.....8	5109LS.....13	<b>Omni glow</b>
BA1005.....8	E250Y.....43	908001.....55
BA2116.....15	E251Y.....43	908002.....55
SL2125.....15	EN22.....52	908003.....55
SL864.....16	EN529.....52	908004.....55
SLR2120.....16	EN91.....52	908005.....55
SLR2134.....16	EN92.....52	908006.....55
SLR2166.....16	EN93.....52	926006.....56
<b>Brady</b>	EN95.....52	926928.....56
56905.....57	EVCAL41BP.....14	927029.....56
56907.....57	EWL21S.....44	927035.....56
56908.....57	EWL25S.....44	927036.....56
115197.....56	HD33A1EN.....48	927046.....56
115199.....56	HD4L33INH.....48	927047.....56
112653B.....56	HD7L33INH.....48	927049.....56
112654B.....56	HDL33AINE.....48	9080761.....55
112655B.....56	INCAP11EH.....50	9080783.....55
113063B.....57	INHDL5L32H.....48	9080802.....55
37851B.....56	INRUB21EH.....43	9080826.....55
38097B.....56	INRUB22EH.....43	9080847.....55
38098B.....56	MS2DLED.....43	9080988.....55
80753B.....56	<b>FoxFury</b>	9270377.....56
80754B.....56	60019.....50	9270381.....56
80755B.....56	200400.....5	92600602.....56
87807B.....57	200800.....5	92692802.....56
87808B.....57	200900.....5	92702902.....56
90839B.....56	400003.....47	92704602.....56
90840B.....56	600026.....50	92704702.....56
90885B.....56	850800.....6	92704902.....56
<b>Checkers Industrial</b>	920310.....35	<b>Pelican Products</b>
FLAREKITA.....54	940010.....35	9415.....13
FLAREKITB.....54	940310.....35	9420.....4
FLAREKITR.....54	850200800.....5	9435.....13
JP9S.....59	200FF2612.....47	9500.....19
LEDFLAREA.....54	200FF2615.....47	9460000110.....4
LEDFLAREB.....54	400009S.....47	9460000245.....4
LEDFLARER.....54	400FF4172.....47	9470000110.....4
<b>Cooper Lighting</b>	400FF4175.....47	9470000245.....4
LED120.....16	410009S.....47	9410LBLACK.....13
LED125.....10	420009S.....47	9410LYELLOW.....13
<b>Duracell</b>	480009S.....47	9420XL.....4
DC1500B2N.....52	700WDGBL.....50	9440BLACK.....5
DC2400B2N.....52	700WDGYE.....50	9440YELLOW.....5
PC1300.....52	940K010FI.....49	9460RS.....4
PC1400.....52	940K010RSC.....49	9470RS.....4

# LIGHTING

It's easy to find the  
**PRODUCTS** continued

**ProBuilt Lighting**

111050.....	18	33302.....	30
111084.....	7	33342.....	31
111100.....	18	33602.....	31
111102.....	6	33702.....	31
111104.....	6	33820.....	30
111203.....	6	33822.....	30
111302.....	6	40163.....	12
311020.....	6	40164.....	12
311030.....	6	44050.....	12
311050.....	6	44904.....	26
511301.....	13	44905.....	26
511401.....	55	44910.....	26
511402.....	55	44911.....	26
511403.....	55	44931.....	11
511404.....	55	45070.....	12
511405.....	55	45071.....	12
511407.....	55	45072.....	12
511408.....	55	45073.....	12
511409.....	55	45074.....	12
511410.....	55	45110.....	11
511500.....	6	45111.....	11
511510.....	6	45113.....	11
511600.....	13	45116.....	11
511939.....	7	45117.....	11
3116000.....	7	45232.....	12
3116001.....	7	45630.....	12
3116002.....	7	45670.....	4
3116003.....	7	45801.....	11
111035LED.....	19	45805.....	11
111065LED.....	19	45806.....	11
11136LED.....	6	45807.....	11
511000LITH.....	8	45816.....	11
511000SLA.....	8	45817.....	11
512000LITH.....	8	45821.....	11
512000SLA.....	8	45825.....	11
E709165.....	7	45826.....	11
E709166.....	7	45845.....	12
E712600.....	8	45851.....	11
E712605.....	8	45855.....	11
E712810.....	8	45856.....	11
E712848.....	8	45857.....	11
IN120LB.....	7	45866.....	11
IN2400L.....	7	45867.....	11
SLTRAVELLER.....	7	45871.....	11
TM120L.....	7	45875.....	11
<b>Rayovac</b>		45876.....	11
AL9V.....	52	45937.....	12
ALAA.....	52	51006.....	34
ALAAA.....	52	51016.....	34
ALC.....	52	51036.....	34
ALD.....	52	51037.....	34
<b>Streamlight</b>		51038.....	34
22050.....	13	51039.....	33
22051.....	13	51043.....	34
22056.....	13	51045.....	34
22311.....	13	61024.....	46
33202.....	30	61025.....	46
33242.....	31	61026.....	46
33254.....	31	61050.....	46
		61051.....	46

61052.....	46
61100.....	49
61101.....	49
61102.....	49
61125.....	49
61126.....	49
61115.....	49
61200.....	46
61301.....	46
61400.....	46
61600.....	46
61601.....	46
61602.....	46
61603.....	46
62202.....	28
62302.....	28
65006.....	33
65012.....	33
65016.....	33
65018.....	33
65020.....	33
65022.....	33
65024.....	33
65035.....	33
65050.....	33
65058.....	33
65069.....	33
65075.....	33
65080.....	33
65186.....	33
65418.....	32
65612.....	32
65618.....	32
65658.....	32
66118.....	33
66120.....	33
66121.....	33
66122.....	33
66133.....	32
66134.....	32
66318.....	33
66418.....	32
67100.....	28
67101.....	28
67201.....	28
68202.....	29
68244.....	29
68254.....	30
68270.....	50
68302.....	29
68344.....	29
68602.....	30
68702.....	30
68720.....	29
68721.....	29
68722.....	29
68723.....	29
68724.....	29
68820.....	29
68821.....	29

68822.....	29
69140.....	49
69157.....	49
71500.....	35
71600.....	32
72001.....	35
72003.....	35
72016.....	35
72101.....	35
72203.....	35
73001.....	35
73002.....	35
73003.....	35
73005.....	35
73006.....	35
73007.....	35
73100.....	35
75000.....	21
75002.....	21
75014.....	21
75068.....	21
75161.....	21
75429.....	22
75430.....	22
75431.....	22
75432.....	22
75433.....	22
75434.....	22
75453.....	21
75454.....	21
75455.....	21
75456.....	21
75457.....	21
75458.....	21
75650.....	25
75651.....	25
75652.....	25
75654.....	25
75660.....	21
75661.....	21
75662.....	21
75663.....	21
75664.....	21
75665.....	21
75666.....	21
75675.....	21
75684.....	25
75685.....	25
75710.....	22
75711.....	22
75712.....	22
75713.....	22
75732.....	22
75735.....	22
75753.....	22
75760.....	22
75761.....	22
75762.....	22
75763.....	22
75782.....	22
75785.....	22
75799.....	22
75810.....	23
75811.....	23

75812.....	23
75813.....	23
75832.....	23
75835.....	23
75853.....	23
75860.....	21
75861.....	21
75862.....	21
75863.....	21
75882.....	21
75885.....	21
75899.....	21
75900.....	21
75960.....	22
75970.....	23
75980.....	21
76000.....	24
76002.....	24
76014.....	24
76025.....	24
76030.....	24
76110.....	25
76111.....	25
76112.....	25
76113.....	25
76116.....	25
76132.....	25
76135.....	25
76149.....	25
76150.....	25
76160.....	25
76161.....	25
76162.....	25
76163.....	25
76166.....	25
76182.....	25
76185.....	25
76199.....	25
76203.....	25
76341.....	24
76343.....	24
76410.....	24
76411.....	24
76412.....	24
76440.....	24
76441.....	24
76442.....	24
76500.....	24
76502.....	24
76514.....	24
76600.....	24
76810.....	23
76811.....	23
76812.....	23
76813.....	23
76832.....	23
76835.....	23
76849.....	23
76850.....	23
76906.....	24
78000.....	23
78014.....	23
78500.....	23
88850.....	31

88851.....	31
88853.....	31
88854.....	50
88860.....	32
88861.....	32
88863.....	32
90500.....	26
90502.....	26
90503.....	26
90509.....	26
90510.....	26
90512.....	26
90513.....	26
90519.....	26
90520.....	26
90522.....	26
90523.....	26
90528.....	26
90540.....	26
90541.....	26
90545.....	26
90601.....	27
90602.....	27
90606.....	27
90607.....	27
90611.....	27
90613.....	27
90620.....	27
90621.....	27
90622.....	27
90626.....	27
90627.....	27
90631.....	27
90633.....	27
90640.....	27
90641.....	27
90642.....	27
90644.....	27
90651.....	27
90657.....	27
90661.....	27
90670.....	27
91621.....	28
91622.....	28
91627.....	28
91642.....	28
91644.....	28
91651.....	28
91652.....	28
91657.....	28
45109SPOT.....	11
<b>Underwater Kinetics</b>	
9007.....	42
9102.....	39
9117.....	39
9220.....	39
9224.....	39
10001.....	39
10005.....	38
10019.....	38
10020.....	38
10022.....	39
10024.....	38
12334.....	36



12335.....	36	1301020080.....	15	1301080099.....	10	1301080151.....	10	1301100002.....	9	1301110035.....	17
12344.....	36	1301020081.....	15	1301080100.....	10	1301080155.....	10	1301100003.....	9	1301110044.....	17
12345.....	36	1301020082.....	15	1301080101.....	10	1301080156.....	10	1301100004.....	9	1301350323.....	9
12346.....	36	1301020083.....	15	1301080102.....	10	1301080157.....	10	1301100021.....	9	1302430021.....	18
12347.....	36	1301020084.....	15	1301080103.....	10	1301080158.....	10	1301100022.....	9	1302430022.....	18
12348.....	36	1301020085.....	15	1301080104.....	10	1301080160.....	10	1301100023.....	9	1302430023.....	18
12350.....	36	1301020095.....	15	1301080105.....	10	1301080162.....	10	1301100031.....	9	1302430025.....	18
12351.....	36	1301020096.....	15	1301080106.....	14	1301080164.....	10	1301100033.....	9	1302430027.....	18
12812.....	41	1301020097.....	15	1301080122.....	14	1301080167.....	10	1301100034.....	9	1302430028.....	18
12836.....	41	1301020098.....	15	1301080123.....	14	1301080187.....	15	1301100035.....	9	1302430029.....	18
12841.....	41	1301020099.....	15	1301080125.....	14	1301080188.....	15	1301100038.....	19	1302430030.....	18
12842.....	42	1301020100.....	15	1301080126.....	14	1301080191.....	15	1301100042.....	9	1302430031.....	18
12846.....	41	1301020101.....	15	1301080128.....	14	1301080193.....	15	1301100043.....	9	1302430032.....	18
13007.....	40	1301020102.....	15	1301080132.....	14	1301080194.....	15	1301100050.....	19	1302430033.....	18
13051.....	40	1301020103.....	15	1301080134.....	14	1301080199.....	15	1301110023.....	17	1302890001.....	9
13203.....	40	1301020106.....	15	1301080136.....	14	1301080202.....	15	1301110024.....	17	1302890002.....	9
13206.....	40	1301020107.....	15	1301080139.....	14	1301080203.....	15	1301110026.....	17	1302890003.....	9
13301.....	40	1301040040.....	18	1301080143.....	14	1301090020.....	14	1301110027.....	17	1302890004.....	9
13330.....	39	1301060097.....	17	1301080144.....	14	1301090028.....	14	1301110030.....	17		
13334.....	39	1301060098.....	17	1301080149.....	14	1301090029.....	14	1301110031.....	17		
13808.....	41	1301060101.....	17								
13809.....	41	1301060104.....	17								
14108.....	37	1301060105.....	17								
14109.....	37	1301060106.....	17								
14120.....	37	1301060107.....	17								
14162.....	38	1301060108.....	17								
14189.....	36	1301060109.....	17								
14191.....	38	1301060110.....	17								
14431.....	37	1301060111.....	17								
14439.....	37	1301060112.....	17								
14457.....	37	1301060113.....	17								
14459.....	37	1301060114.....	17								
14502.....	37	1301060115.....	17								
14506.....	37	1301060116.....	17								
14510.....	38	1301060117.....	17								
14524.....	38	1301060118.....	17								
14816.....	41	1301060119.....	17								
14818.....	42	1301060120.....	18								
14819.....	42	1301060125.....	18								
14833.....	41	1301060126.....	18								
14837.....	41	1301060127.....	18								
14843.....	42	1301070030.....	17								
14845.....	41	1301070031.....	17								
14851.....	42	1301070032.....	17								
14877.....	40	1301070033.....	17								
14884.....	40	1301070035.....	17								
15803.....	41	1301070036.....	17								
16001.....	59	1301070038.....	18								
16002.....	59	1301070039.....	18								
17001.....	48	1301070040.....	18								
17006.....	49	1301070042.....	18								
17007.....	49	1301070043.....	18								
17018.....	49	1301070046.....	17								
17019.....	49	1301080078.....	14								
17501.....	50	1301080083.....	14								
17503.....	50	1301080085.....	14								
22016.....	36	1301080088.....	14								
22101.....	36	1301080091.....	14								
22107.....	36	1301080092.....	14								
22109.....	36	1301080093.....	10								
22110.....	36	1301080094.....	10								
9064.....	42	1301080095.....	10								
<b>Woodhead</b>		1301080097.....	10								
1300910192.....	9	1301080098.....	10								

**NOTES**

**INDEX**

[borderstates.com](http://borderstates.com)



A 100% Employee-owned, American Company  
60-071 (2014-12)  
©2014 Border States Industries, Inc.



**BORDER STATES**  
*Supply Chain Solutions™*